Genie
A TEREX BRAND

Operator's Manual

Z®-80/60

ANSI/CSA
North America
South America
Asia

with
Maintenance
Information

Original Instructions
Sixth Edition
First Printing
Part No. 1331934GT

Contents

Introduction 1
Symbol and Hazard Pictorials Definitions.....5
General Safety 8
Personal Safety..... 14
Work Area Safety..... 15
Legend 25
Controls..... 26
Inspections..... 34
Operating Instructions..... 54
Transport and Lifting Instructions 69
Maintenance 72
Specifications..... 76

Copyright © 2002 by Terex Corporation

Sixth Edition: First Printing, November 2025

Genie and "Z" are registered trademarks of Terex South Dakota, Inc. in the U.S.A. and many other countries.

These machines comply with
ANSI/SAIA A92.20
CAN/CSA B354.6

Introduction

About this manual

Genie appreciates your choice of our machine for your application. Our number one priority is user safety, which is best achieved by our joint efforts. This book is an operation and daily maintenance manual for the user or operator of a Genie machine.


This manual should be considered a permanent part of your machine and should remain with the machine at all times. If you have any questions, contact Genie.

Product Identification

The machine serial number is located on the serial label.

Serial number stamped on chassis

Serial label (located under cover)

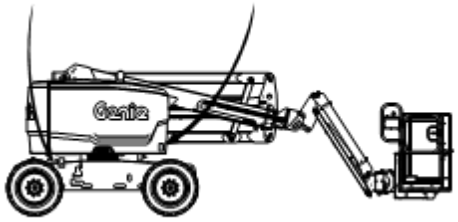


Intended Use and Familiarization Guide

The intended use of this machine is to lift personnel, including tools, and materials to an aerial work site. Before operating the machine, it's the operator's responsibility to read and understand this familiarization guide.

- ☑ Each person must be trained to operate a Mobile Elevating Work Platform (MEWP).
- ☑ Familiarization with the MEWP must be given to each person who is authorized, competent and trained.
- ☑ Only trained and authorized personnel should be permitted to operate the machine.
- ☑ The operator is responsible to read, understand, and obey the manufacturer's instructions and safety rules provided in the Operator's Manual.
- ☑ The Operator's Manual is located in the manual storage container, at the platform.
- ☑ For specific product applications, see **Contacting The Manufacturer**.

Introduction

Platform controls symbology and related machine movement:


Platform level swtich


Platform rotate switch


Jib boom up/down


Primary boom up/down


Turntable rotate



Primary boom extend/retract switch



Secondary boom up/down


Drive forward/reverse


Steer right/left

Ground controls symbology and related machine movement:


Platform level, jib boom up/down, primary boom extend/retract, primary boom up/down, and secondary boom retract/lower.


Turntable rotate and platform rotate

Sequential functions and movement:

- Drive and steer.

Interlocked functions:

- Elevated drive speed.
- Elevated drive in an off-level condition.
- Rotate the turntable until the boom is positioned between the circle end wheels.
- All platform and ground controls.

Limitations of use:

- The intended use of this machine is to lift personnel, including tools, and materials to an aerial work site.
- Do not elevate the platform unless the machine is on firm level ground.

Stability enhancing means:

- Foam filled tires (if equipped).

Restricted operating envelope:

- 1,000 lbs/454 kg platform capacity. (if equipped)

Introduction

Bulletin Distribution and Compliance

Safety of product users is of paramount importance to Genie. Various bulletins are used by Genie to communicate important safety and product information to dealers and machine owners.

The information contained in the bulletins is tied to specific machines using the machine model and serial number.

Distribution of bulletins is based on the most current owner on record along with their associated dealer, so it is important to register your machine and keep your contact information up to date.

To ensure safety of personnel and the reliable continued operation of your machine, be sure to comply with the action indicated in a respective bulletin.

To view any open bulletins for your machine, visit us on the web at www.genielift.com.

Contacting the Manufacturer

At times it may be necessary to contact Genie. When you do, be ready to supply the model number and serial number of your machine, along with your name and contact information. At minimum, Genie should be contacted for:

Accident reporting

Questions regarding product applications and safety

Standards and regulatory compliance information

Current owner updates, such as changes in machine ownership or changes in your contact information. See Transfer of Ownership, below.

Transfer of Machine Ownership

Taking a few minutes to update owner information will ensure that you receive important safety, maintenance and operating information that applies to your machine.

Please register your machine by visiting us on the web at www.genielift.com or by calling us toll free at 1-800-536-1800.

Introduction



Danger

Failure to obey the instructions and safety rules in this manual will result in death or serious injury.

Do Not Operate Unless:

☑ You learn and practice the principles of safe machine operation contained in this operator's manual.

1 Avoid hazardous situations.

Know and understand the safety rules before going on to the next section.

2 Always perform a pre-operation inspection.

3 Always perform function tests prior to use.

4 Inspect the workplace.

5 Only use the machine as it was intended.

☑ You read, understand and obey the manufacturer's instructions and safety rules—safety and operator's manuals and machine decals.

☑ You read, understand and obey employer's safety rules and worksite regulations.

☑ You read, understand and obey all applicable governmental regulations.

☑ You are properly trained to safely operate the machine.

Safety Sign Maintenance

Replace any missing or damaged safety signs. Keep operator safety in mind at all times. Use mild soap and water to clean safety signs. Do not use solvent-based cleaners because they may damage the safety sign material.

Hazard Classification

Decals on this machine use symbols, color coding, and signal words to identify the following:



Safety alert symbol—used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.





⚠ DANGER Indicates a hazardous situation which, if not avoided, will result in death or serious injury.

⚠ WARNING Indicates a hazardous situation which, if not avoided, could result in death or serious injury.






⚠ CAUTION Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

NOTICE Indicates a property damage message.





Symbol and Hazard Pictorials Definitions

 Fire hazard	 Explosion hazard	 Explosion hazard	 Read the service manual	 No smoking. No flame. Stop engine.
 Fire extinguisher	 No smoking	 Explosion hazard	 Electrocution hazard	 Maintain required clearance
 Tip-over hazard	 Tip-over hazard	 Tip-over hazard	 Tip-over hazard	 Tire specifications


Symbol and Hazard Pictorials Definitions

 Wheel load	 Wind speed	 Maximum capacity	 Manual force	 Weight of welder reduces capacity
 Tie-down point	 Lifting point	 Platform tie-down instructions	 Lifting and tie down instructions	 Lanyard anchorage points
 Corrosive acid.	 Color coded direction arrows	 Runaway hazard	 Collision hazard	 Overhead obstruction

Symbol and Hazard Pictorials Definitions


 Electrocution hazard	 Avoid contact	 Disconnect battery	 Voltage rating for power to platform	 Pressure rating for air line to platform
 Crush hazard	 Support the platform or boom during maintenance	 Do not use ether or other high energy starting aids on machines equipped with glow plugs.	 Explosion hazard	 Relieve all pressure
Recovery procedure if tilt alarm sounds while elevated.   Platform uphill: 1 Lower primary. 2 Lower secondary. 3 Retract primary. Platform downhill: 1 Retract primary. 2 Lower secondary. 3 Lower primary.		 Read the operator's manual	 Emergency lowering	 Access by trained and authorized personnel only	

General Safety

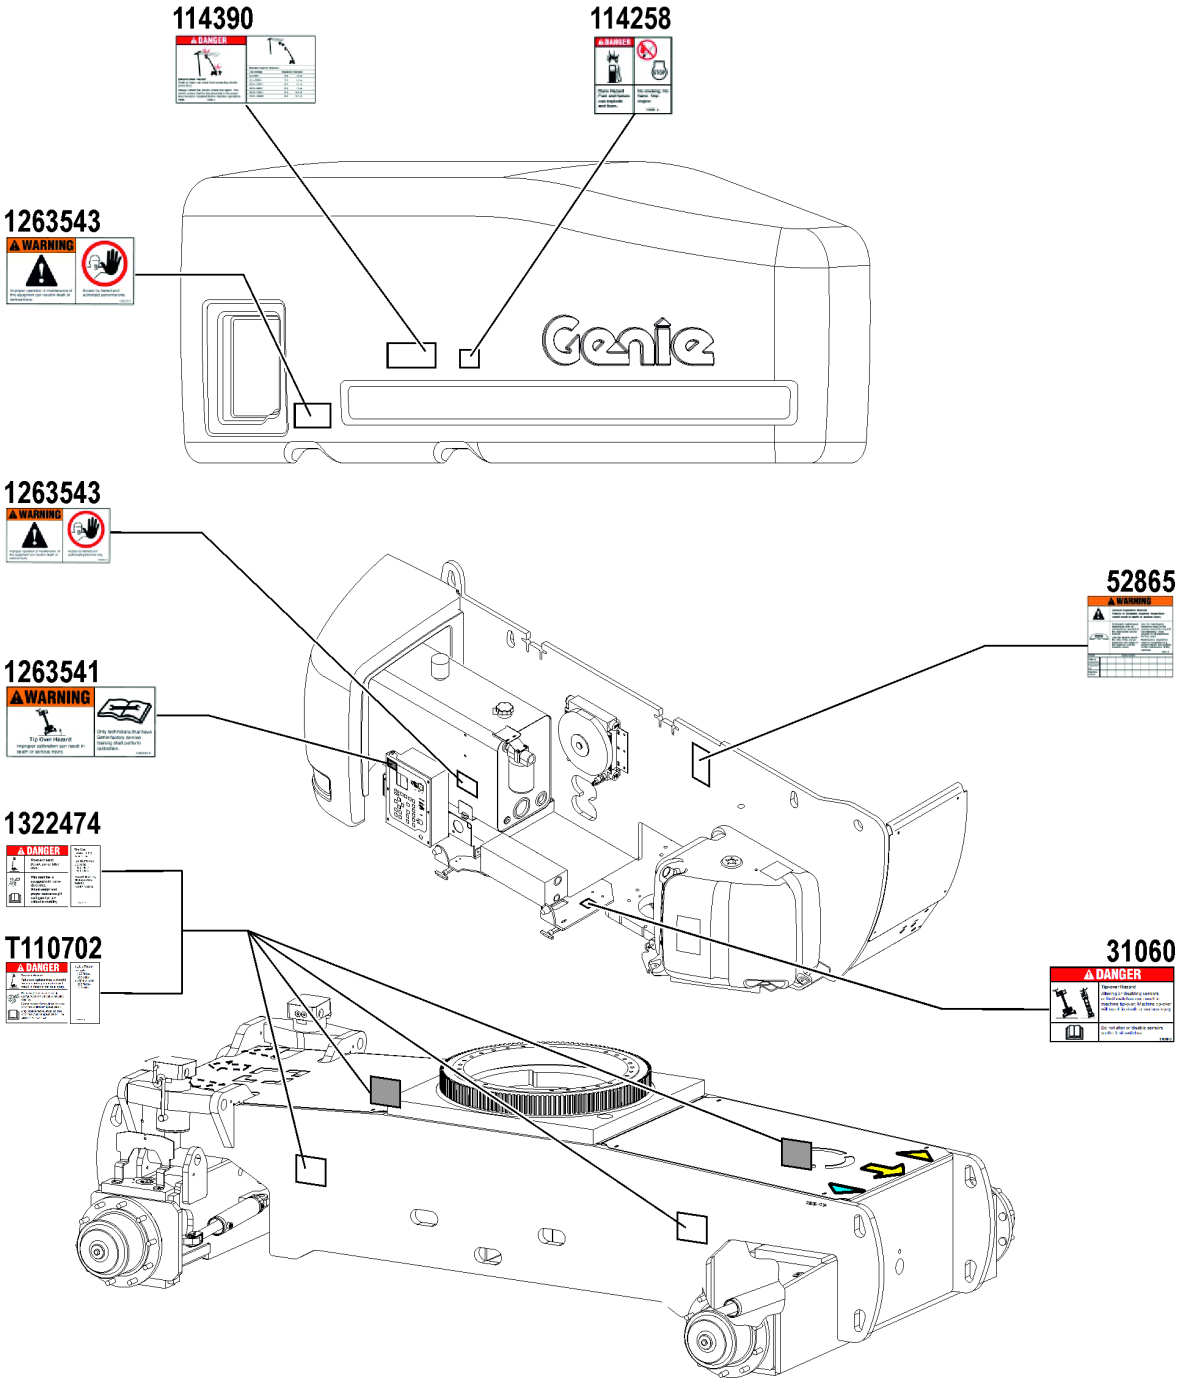


Shading indicates decal is hidden from view, i.e. under covers

General Safety

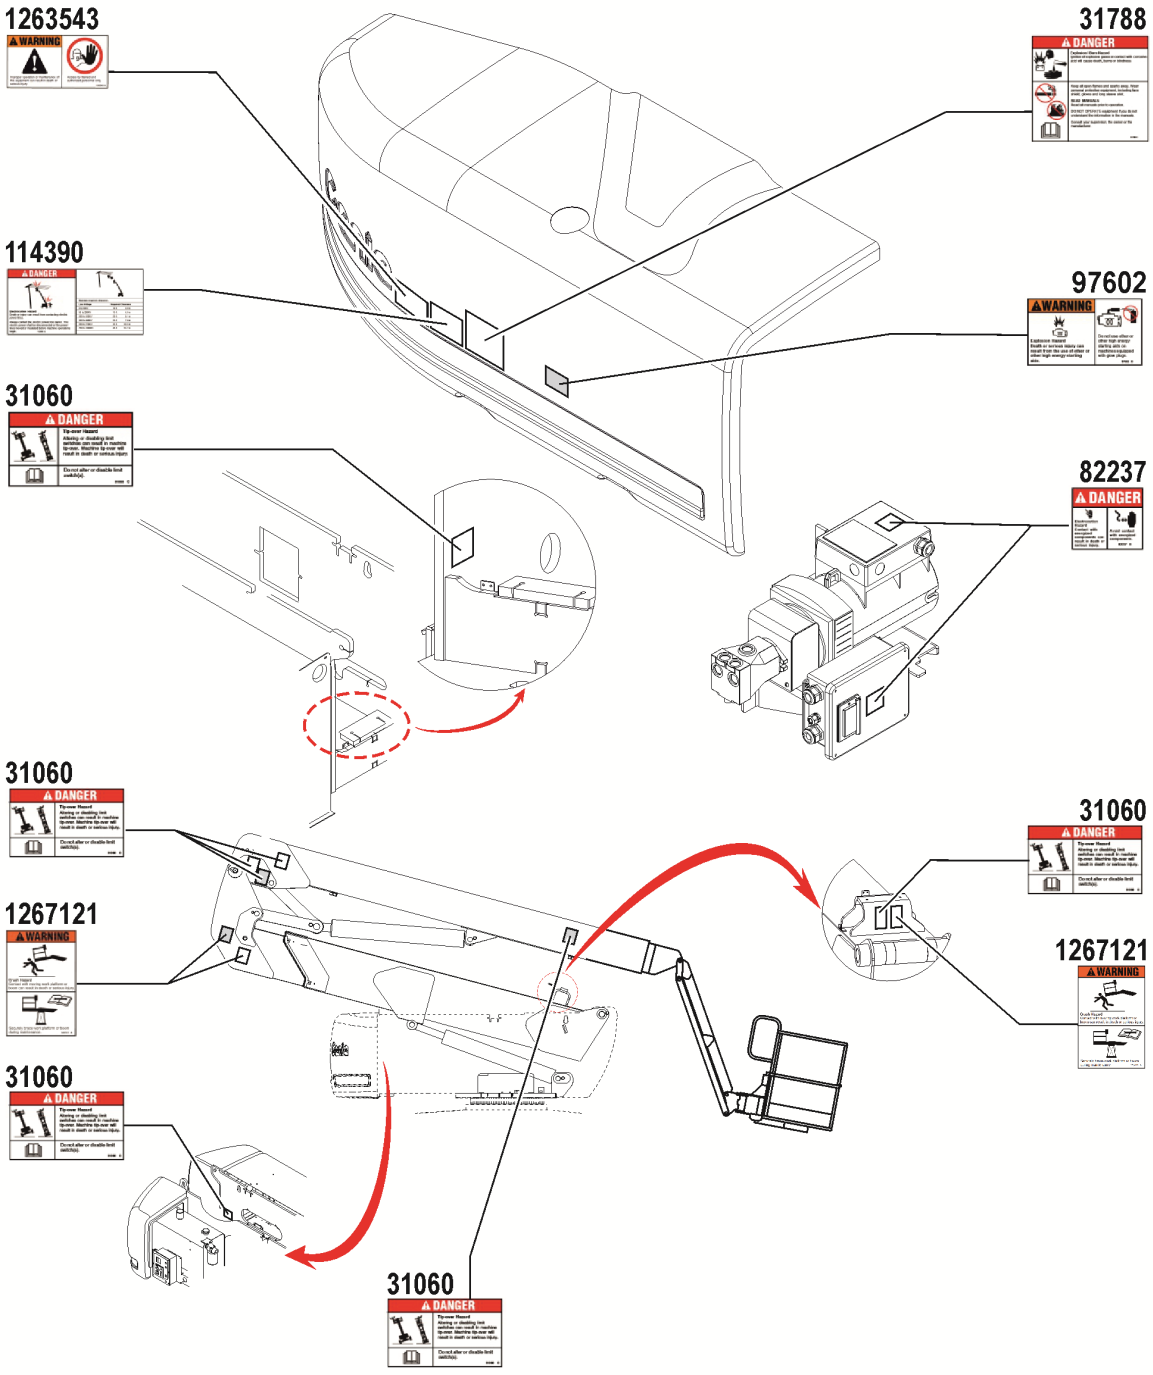


Shading indicates decal is hidden from view, i.e. under covers


General Safety

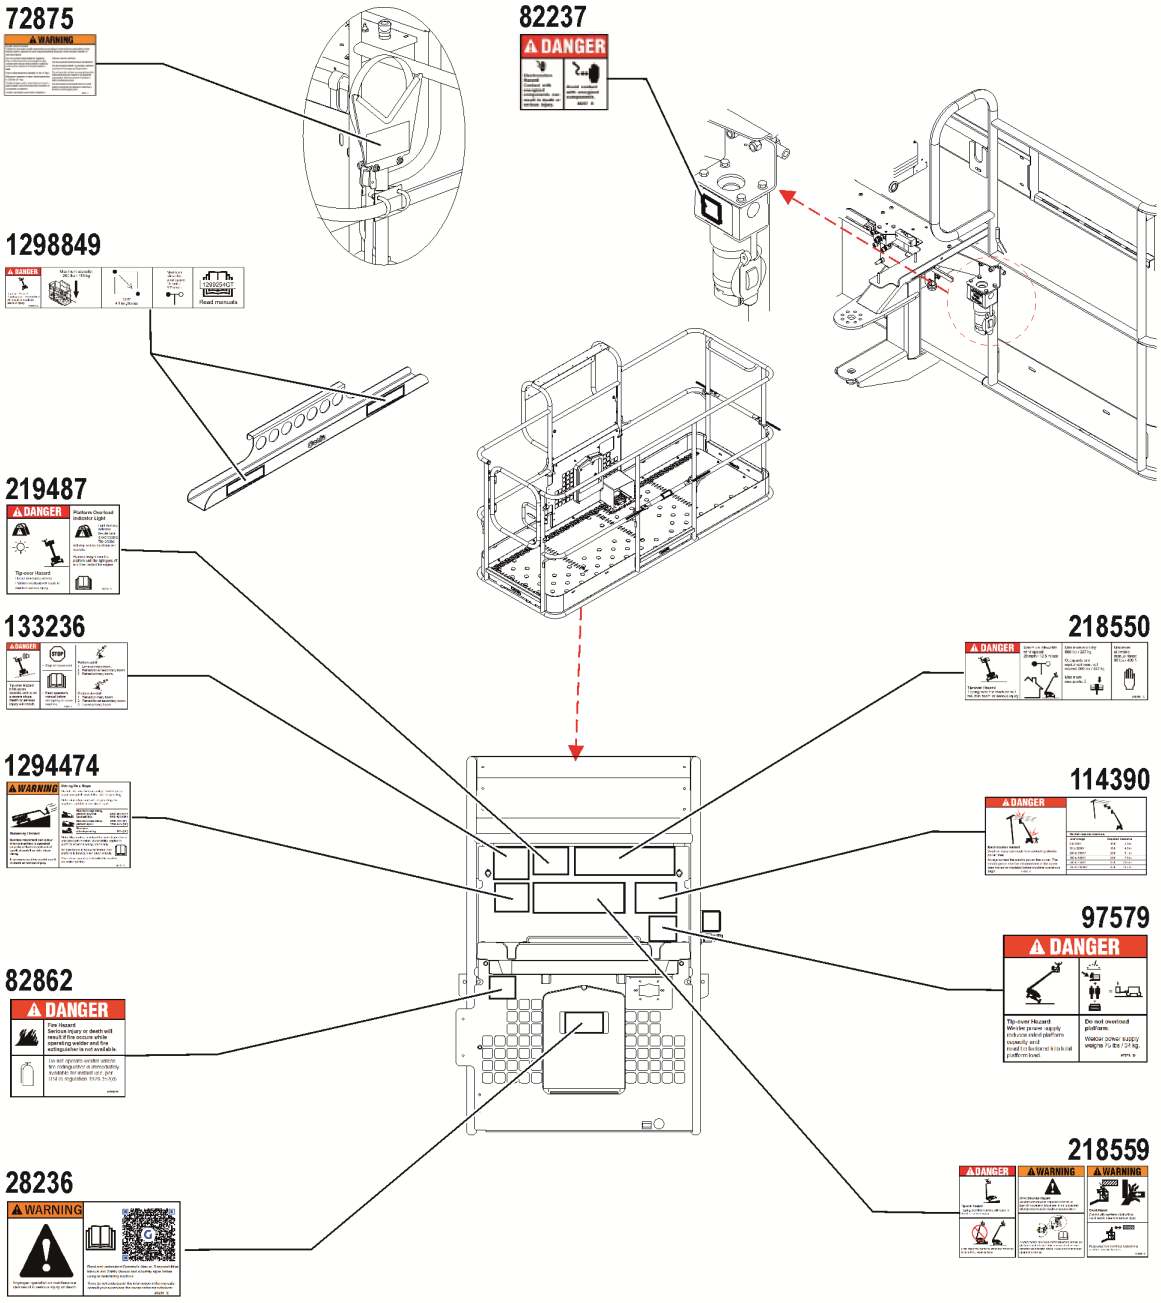


General Safety

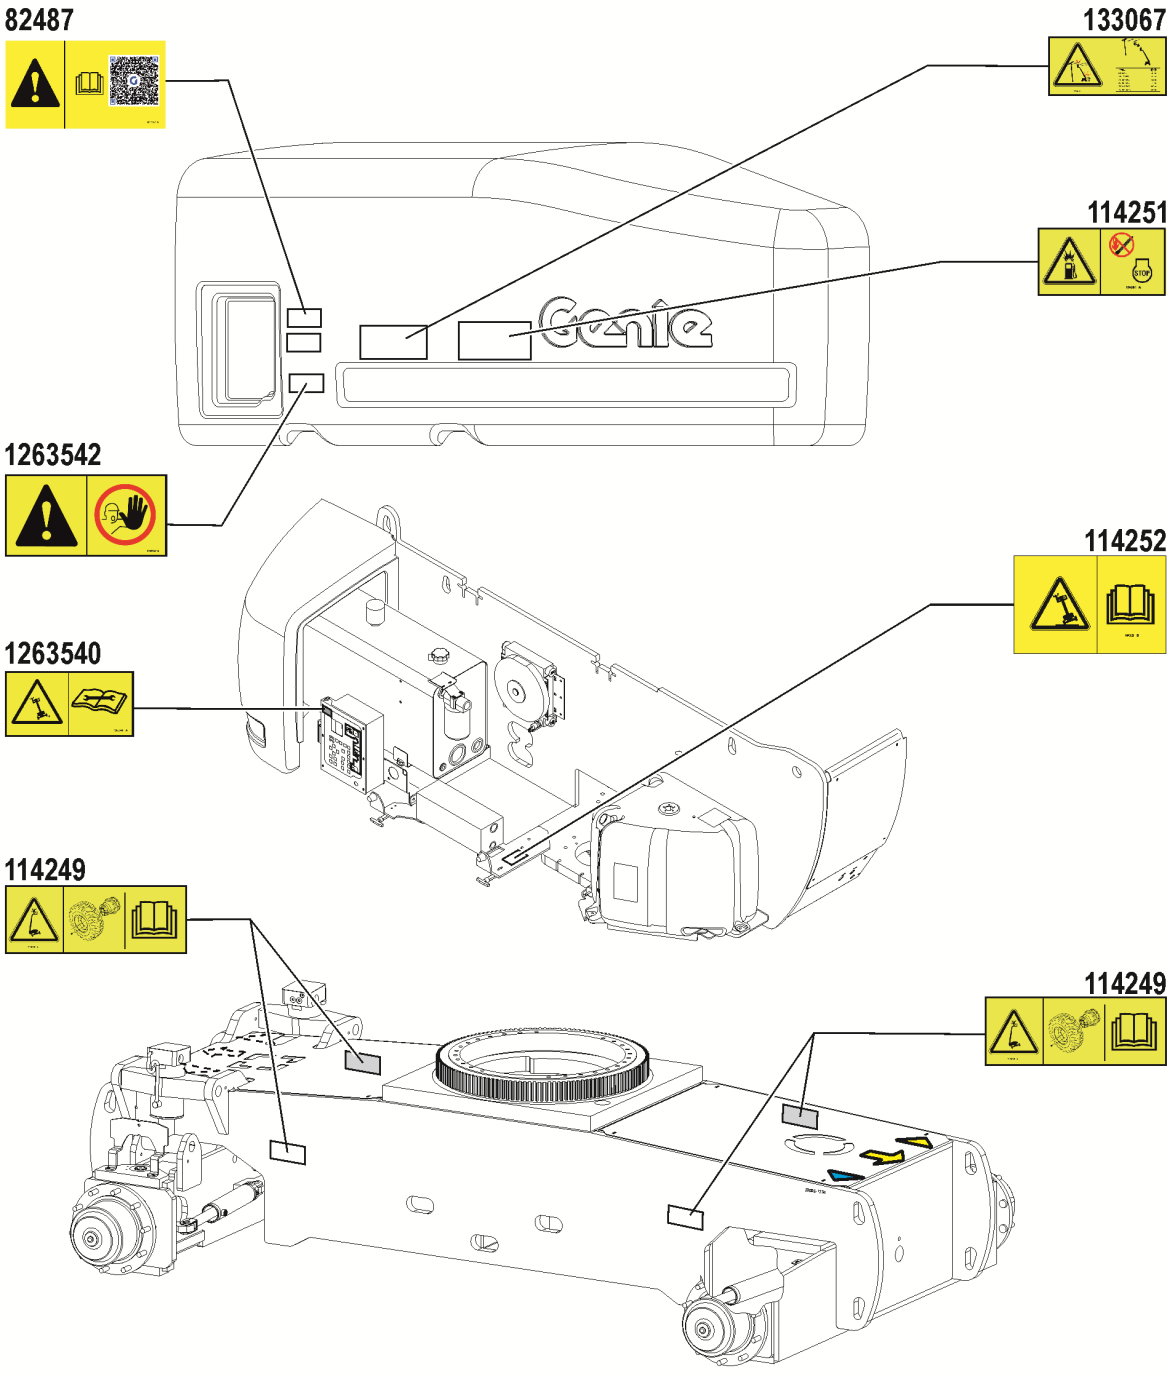

General Safety

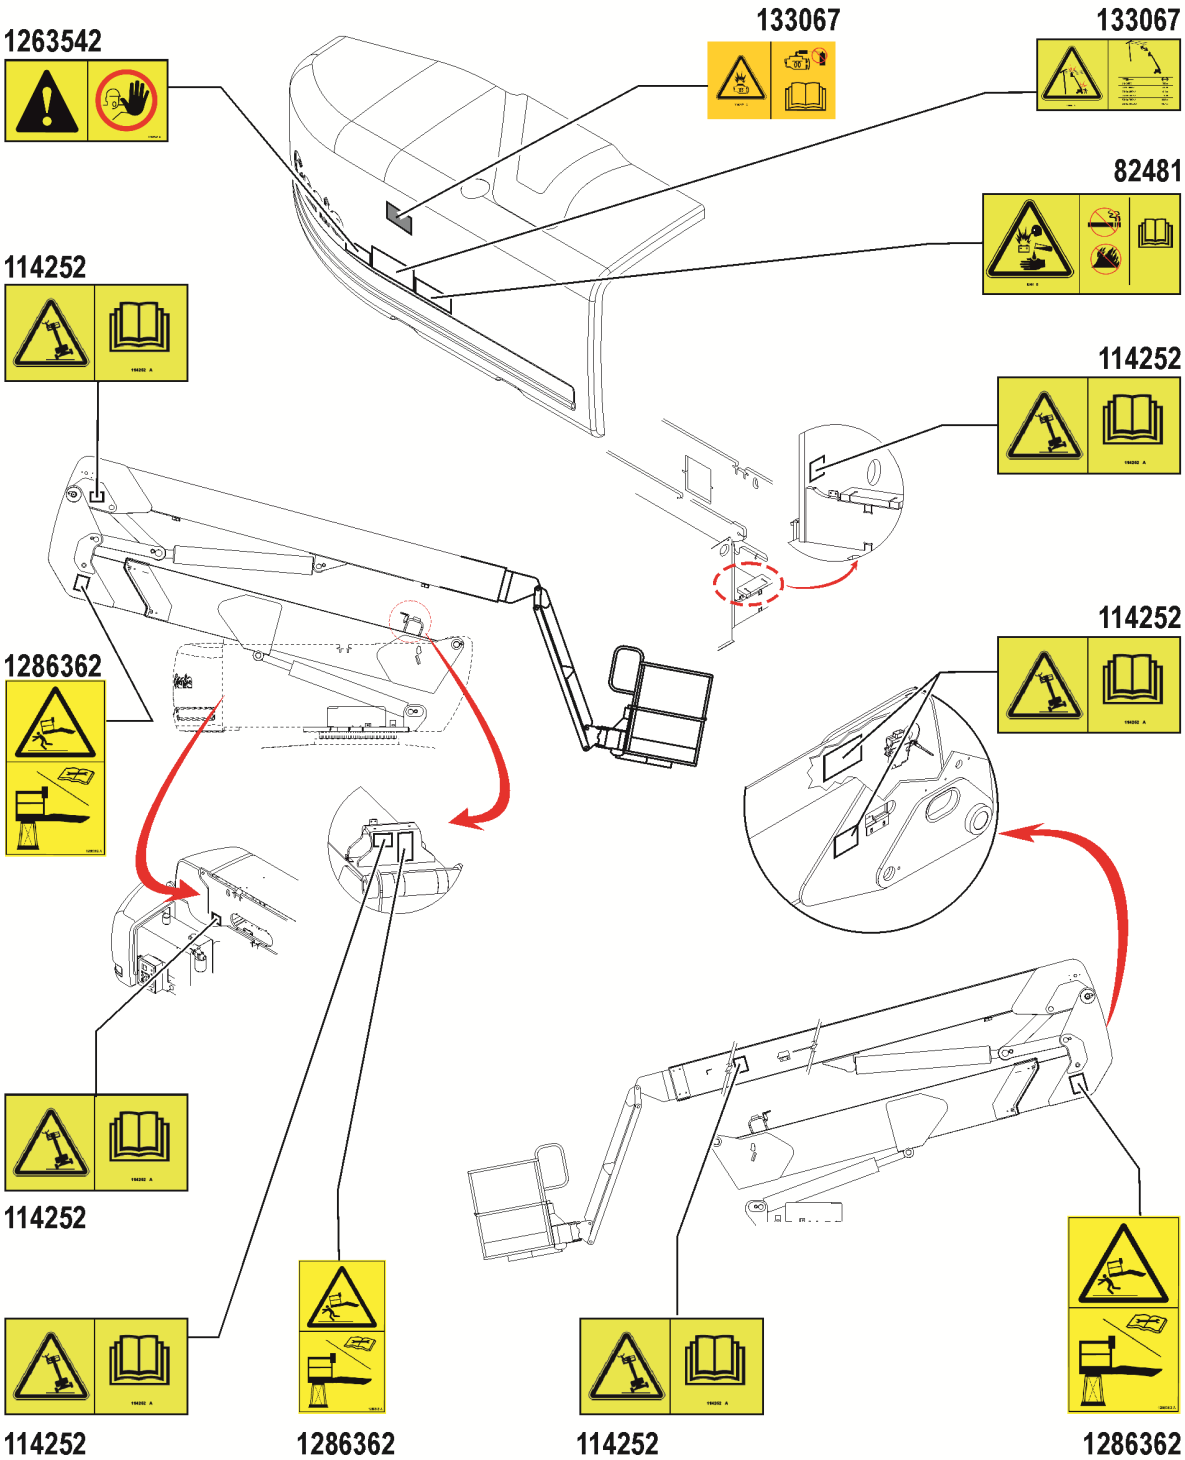

General Safety

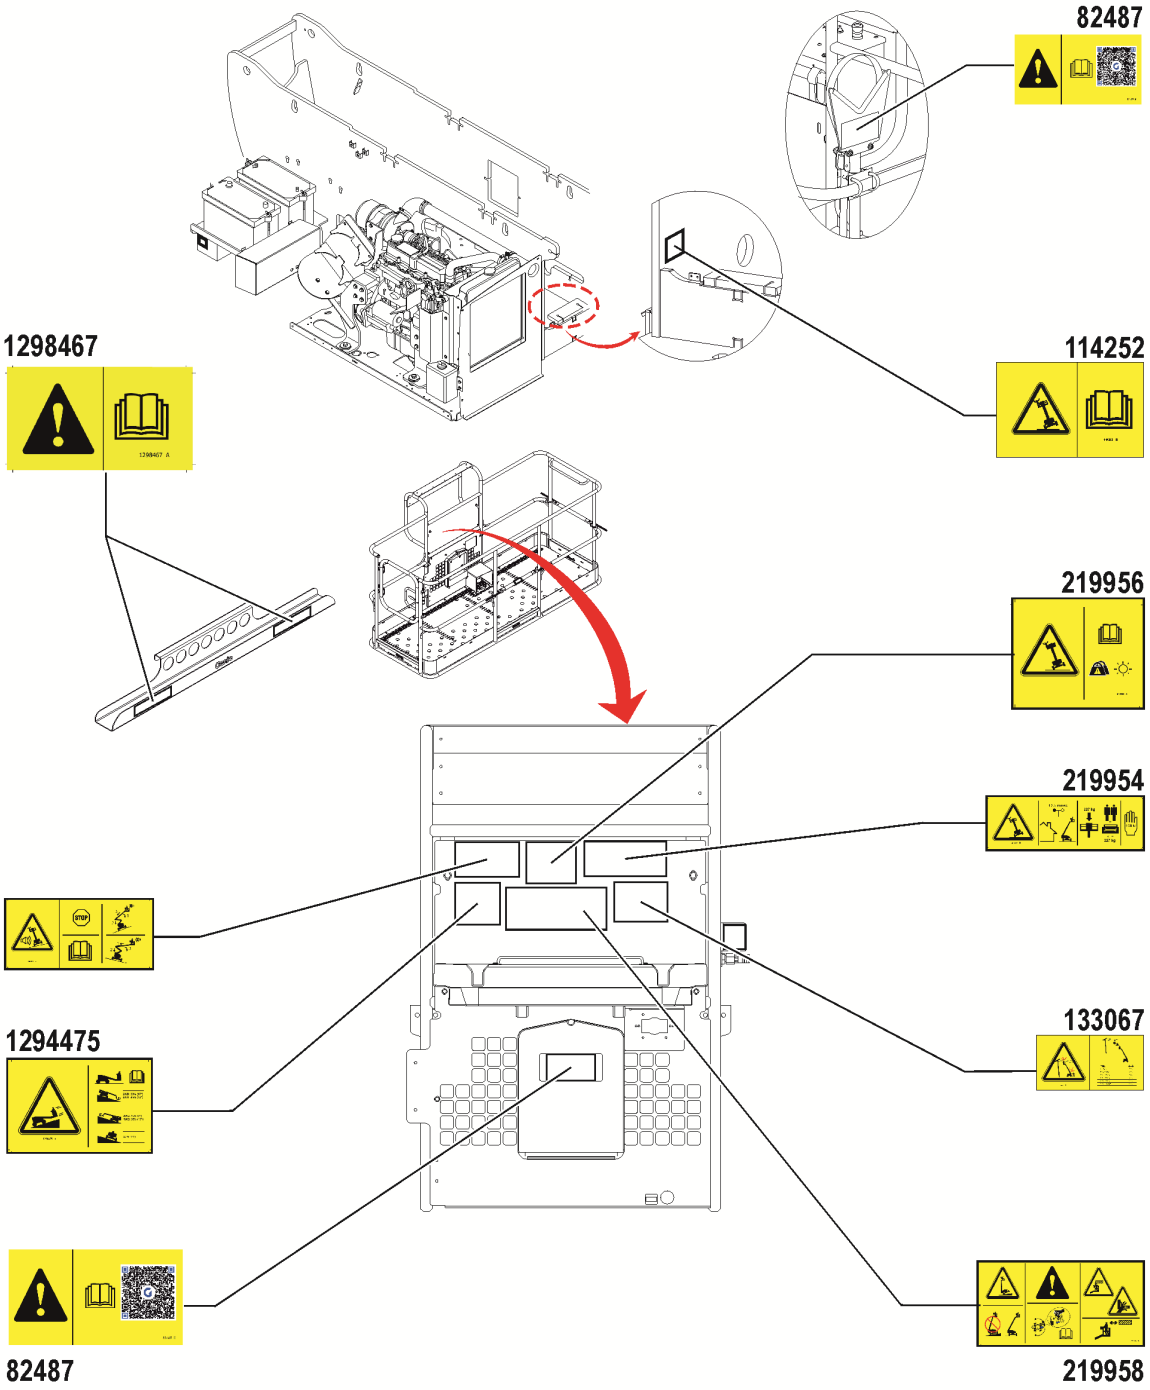

Shading indicates decal is hidden from view, i.e. under covers

Personal Safety

Personal Fall Protection

Personal fall protection equipment (PFPE) is required when operating this machine.

Occupants must wear a safety belt or harness in accordance with governmental regulations. Attach the lanyard to the anchor provided in the platform.

Operators must comply with employer, job site and governmental rules regarding the use of personal protective equipment.

All PFPE must comply with applicable governmental regulations, and must be inspected and used in accordance with the PFPE manufacturer’s instructions.

Work Area Safety

⚠ Electrocution Hazards

This machine is not electrically insulated and will not provide protection from contact with or proximity to electrical current.



Obey all local and governmental regulations regarding required clearance from electrical power lines. At a minimum, the required clearance contained in the chart below must be followed.

Line Voltage	Required Clearance	
0 to 50KV	10 ft	3.05 m
50 to 200KV	15 ft	4.60 m
200 to 350KV	20 ft	6.10 m
350 to 500KV	25 ft	7.62 m
500 to 750KV	35 ft	10.67 m
750 to 1000KV	45 ft	13.72 m

Allow for platform movement, electrical line sway or sag, and beware of strong or gusty winds.



Keep away from the machine if it contacts energized power lines. Personnel on the ground or in the platform must not touch or operate the machine until energized power lines are shut off.

Do not operate the machine during lightning or storms.

Do not use the machine as a ground for welding.

⚠ Tip-over Hazards

Occupants, equipment and materials shall not exceed the maximum platform capacity or the maximum platform capacity of the platform extension.

Maximum platform capacity	500 lbs	227 kg
Maximum occupants		2

The weight of options and accessories, such as pipe cradles, panel cradles and welders, will reduce the rated platform capacity and must be subtracted from the platform capacity. See the decals with the options and accessories.

If using accessories, read, understand and obey the decals, instructions and manuals with the accessory.

Work Area Safety



Do not raise or extend the boom unless the machine is on a firm, level surface.




Do not depend on the tilt alarm as a level indicator. The tilt alarm sounds in the platform only when the machine is on a severe slope.

If the tilt alarm sounds while the boom is lowered: Do not extend, rotate or raise the boom above horizontal. Move the machine to a firm, level surface before raising the platform.

If the tilt alarm sounds when the platform is raised, use extreme caution. Identify the condition of the boom on the slope as shown below. Follow the steps to lower the boom before moving to a firm, level surface. Do not rotate the boom while lowering.

The recovery mode should be used only by trained and authorized personnel.




If the tilt alarm sounds with the platform uphill:

1 Lower the primary boom.

2 Retract/lower the secondary boom.

3 Retract the primary boom.



If the tilt alarm sounds with the platform downhill:

1 Retract the primary boom.

2 Retract/lower the secondary boom.

3 Lower the primary boom.



Do not raise the boom when wind speeds may exceed 28 mph/12.5 m/s. If wind speeds exceed 28 mph/12.5 m/s when the boom is raised, lower the boom and do not continue to operate the machine.

Do not operate the machine in strong or gusty winds. Do not increase the surface area of the platform or the load. Increasing the area exposed to the wind will decrease machine stability.

Work Area Safety



Use extreme care and slow speeds while driving the machine in the stowed position across uneven terrain, debris, unstable or slippery surfaces and near holes and drop-offs.

Do not drive the machine on or near uneven terrain, unstable surfaces or other hazardous conditions with the boom raised or extended.

Do not use the machine as a crane.

Do not push the machine or other objects with the boom.

Do not contact adjacent structures with the boom.

Do not tie the boom or platform to adjacent structures.

Do not place loads outside the platform perimeter.



Do not push off or pull toward any object outside of the platform.

Maximum allowable manual force - 90 lbs / 400 N

Do not alter or disable machine components that in any way affect safety and stability.

Do not replace items critical to machine stability with items of different weight or specification.

Do not replace factory-installed tires with tires of different specification or ply rating.

Do not replace factory-installed foam-filled tires with air-filled tires. Wheel weight is critical to stability.

High flotation tires must be factory-installed. Do not replace standard factory-installed tires with high flotation tires.

Do not modify or alter a mobile elevating work platform without prior written permission from the manufacturer. Mounting attachments for holding tools or other materials onto the platform, toeboards, or guard rail system can increase the weight in the platform and the surface area of the platform or the load.

Work Area Safety



Do not place or attach fixed or overhanging loads to any part of this machine.



Do not place ladders or scaffolds in the platform or against any part of this machine.

Do not transport tools and materials unless they are evenly distributed and can be safely handled by person(s) in the platform.

Do not use the machine on a moving or mobile surface or vehicle.

Be sure all tires are in good condition, air-filled tires are properly inflated and lug nuts are properly tightened.

Do not use the platform controls to free a platform that is caught, snagged, or otherwise prevented from normal motion by an adjacent structure. All personnel must be removed from the platform before attempting to free the platform using the ground controls.

⚠ Operation on Slopes Hazards


Do not drive the machine on a slope that exceeds the maximum uphill, downhill or side slope rating of the machine. Slope rating applies only to machines in the stowed position.

Maximum slope rating, stowed position, 2WD		
Platform downhill	30%	(17°)
Platform uphill	15%	(9°)
Side slope	25%	(14°)
Maximum slope rating, stowed position, 4WD		
Platform downhill	45%	(24°)
Platform uphill	35%	(19°)
Side slope	25%	(14°)

Note: Slope rating is subject to ground conditions with one person in the platform and adequate traction. Additional platform weight may reduce slope rating. See Driving on a Slope in the Operating Instructions section.

Work Area Safety

⚠ Fall Hazards



Occupants must wear a safety belt or harness in accordance with governmental regulations. Attach the lanyard to the anchor provided in the platform.



Do not sit, stand, or climb on the platform guard rails. Maintain a firm footing on the platform floor at all times.



Do not climb down from the platform when raised.


Keep the platform floor clear of debris.

Lower the platform entry mid-rail or close the entry gate before operating.

Do not enter or exit the platform unless the machine is in the stowed position and the platform is at ground level.

Hazards related with the specific product application of exiting at height have been considered in the design of the machine, for further information contact Genie (see section Contacting the Manufacturer).

⚠ Collision Hazards



Be aware of limited sight distance and blind spots when driving or operating.

Be aware of the boom position and tailswing when rotating the turntable.



Check the work area for overhead obstructions or other possible hazards.



Be aware of crushing hazards when grasping the platform guard rail.

Operators must comply with employer, job site, and governmental rules regarding use of personal protective equipment.

Work Area Safety

Observe and use the color-coded direction arrows on the platform controls and drive chassis for drive and steer functions.



Do not lower the boom unless the area below is clear of personnel and obstructions.



Limit travel speed according to the condition of the ground surface, congestion, slope, location of personnel, and any other factors which may cause collision.

Do not operate a boom in the path of any crane unless the controls of the crane have been locked out and/or precautions have been taken to prevent any potential collision.

No stunt driving or horseplay while operating a machine.

⚠ Bodily Injury Hazard

Always operate the machine in a well-ventilated area to avoid carbon monoxide poisoning.

Do not operate the machine with a hydraulic oil or air leak. An air leak or hydraulic leak can penetrate and/or burn skin.

Improper contact with components under any cover will cause serious injury. Only trained maintenance personnel should access compartments. Access by the operator is only advised when performing a pre-operation inspection. All compartments must remain closed and secured during operation.

⚠ Explosion and Fire Hazards

Do not start the engine if you smell or detect liquid petroleum gas (LPG), gasoline, diesel fuel or other explosive substances.

Do not refuel the machine with the engine running.

Refuel the machine and charge the battery only in an open, well-ventilated area away from sparks, flames and lighted tobacco.

Do not operate the machine or charge the battery in hazardous locations or locations where potentially flammable or explosive gases or particles may be present.

Do not spray ether into engines equipped with glow plugs.

Work Area Safety

⚠ Damaged Machine Hazards

Do not use a damaged or malfunctioning machine.

Conduct a thorough pre-operation inspection of the machine and test all functions before each work shift. Immediately tag and remove from service a damaged or malfunctioning machine.

Be sure all maintenance has been performed as specified in this manual and the appropriate Genie service manual.

Be sure all decals are in place and legible.

Be sure the operator's, safety, and responsibilities manuals are complete, legible, and in the storage container located on the machine.

⚠ Component Damage Hazards

Do not use any battery or charger greater than 12V to jump-start the engine.

Do not use the machine as a ground for welding.

Do not operate the machine in locations where extremely high magnetic fields may be present.

⚠ Battery Safety

Burn Hazards



Batteries contain acid. Always wear protective clothing and eye wear when working with batteries.

Avoid spilling or contacting battery acid. Neutralize battery acid spills with baking soda and water.

Explosion Hazards



Keep sparks, flames, and lighted tobacco away from batteries. Batteries emit explosive gas.





⚠ Electrocution Hazard

Avoid contact with electrical terminals.

Work Area Safety

⚠ Contact Alarm Safety

Read, understand and obey all warnings and instructions provided with the contact alarm.

Do not exceed the rated platform capacity. The weight of the contact alarm assembly will reduce the rated platform capacity and must be subtracted from the total platform load.

The contact alarm assembly weighs 10 lbs/4.5 kg.

Be sure the contact alarm is securely installed.

⚠ Welder Safety

Read, understand and obey all warnings and instructions provided with the welding power unit.

Do not connect weld leads or cables unless the welding power unit is turned off at the platform controls.

Do not operate unless the weld cables are properly connected and the welder is properly grounded.

The weight of the welder will reduce the rated platform capacity and must be factored into the total platform load. The welder power supply weighs 75 lbs/34 kg.

Do not operate the welder unless a fire extinguisher is immediately available for instant use, per OSHA regulation 1926.352(d).

⚠ Weld Line to Platform Safety

Read, understand and obey all warnings and instructions provided with the welding power unit.

Do not connect weld leads or cables unless the welding power unit is turned off at the platform controls.

Do not operate unless the weld cables are properly connected.

Connect the positive lead to the twist-lock connector at the turntable and platform.

Clamp the negative lead to the ground post at the turntable and platform.

Work Area Safety

⚠ Pipe Cradle Safety

Read, understand, and obey all warnings and instructions provided with the pipe cradles.

Do not exceed the rated platform capacity. The pipe cradle assembly and the weight in the pipe cradles will reduce rated platform capacity and must be factored into total platform load.

The pipe cradle assembly weighs 21 lbs/9.5 kg.

The maximum capacity of the pipe cradle assembly is 200 lbs/91 kg.

The weight of the pipe cradle assembly and the load in the pipe cradles may limit the maximum number of occupants in platform.

Center the load within the perimeter of the platform.

Secure the load to the platform.

Do not obstruct the entrance or the exit of the platform.

Do not obstruct the ability to operate the platform controls or the red Emergency Stop button.

Do not operate unless you are adequately instructed and are aware of all of the hazards associated with movement of the platform with an overhanging load.

Do not cause a horizontal force or side load to machine by raising or lowering a fixed or overhanging load.

Electrocution Hazard: Keep pipes away from all energized electrical conductors.

⚠ Panel Cradle Safety

Read, understand and obey all warnings and instructions provided with the panel cradles.

Do not exceed the rated platform capacity. The combined weight of the cradles, panels, occupants, tools and any other equipment must not exceed rated capacity.

The panel cradle assembly weighs 30 lbs/13.6 kg.

The maximum capacity of the panel cradles is 250 lbs/113 kg.

The weight of the panel cradles and the load in the panel cradles may limit the maximum number of occupants in platform to one person.

Secure the cradles to the platform. Secure the panel (s) to the platform railing using the straps provided.

Do not operate unless you are adequately instructed and are aware of all hazards associated with lifting panels.

Do not cause a horizontal force or side load to machine by raising or lowering a fixed or overhanging load.

Maximum vertical height of panels: 4 ft/1.2 m.

Maximum wind speed: 15 mph/6.7 m/sec.

Maximum panel area: 32 sq ft/3 m^2.

Work Area Safety

Tow Package Safety

Read, understand and obey all warnings and instructions provided with the tow package.

When vehicle is in free-wheel configuration, there are no brakes and machine may move, resulting in death, serious injury or property damage.

Do not exceed maximum towing speed, or maximum towing time.

Maximum tow speed	8 mph/13 km/h
Maximum towing time at 8 mph/13 km/h	30 minutes
Maximum towing time at 6 mph/10 km/h	60 minutes

Lockout After Each Use


1 Select a safe parking location—firm level surface, clear of obstruction and traffic.

2 Retract and lower the boom to the stowed position.

3 Rotate the turntable until the boom is positioned between the circle end wheels.

4 Turn the key switch to the off position and remove the key to secure from unauthorized use.


Legend

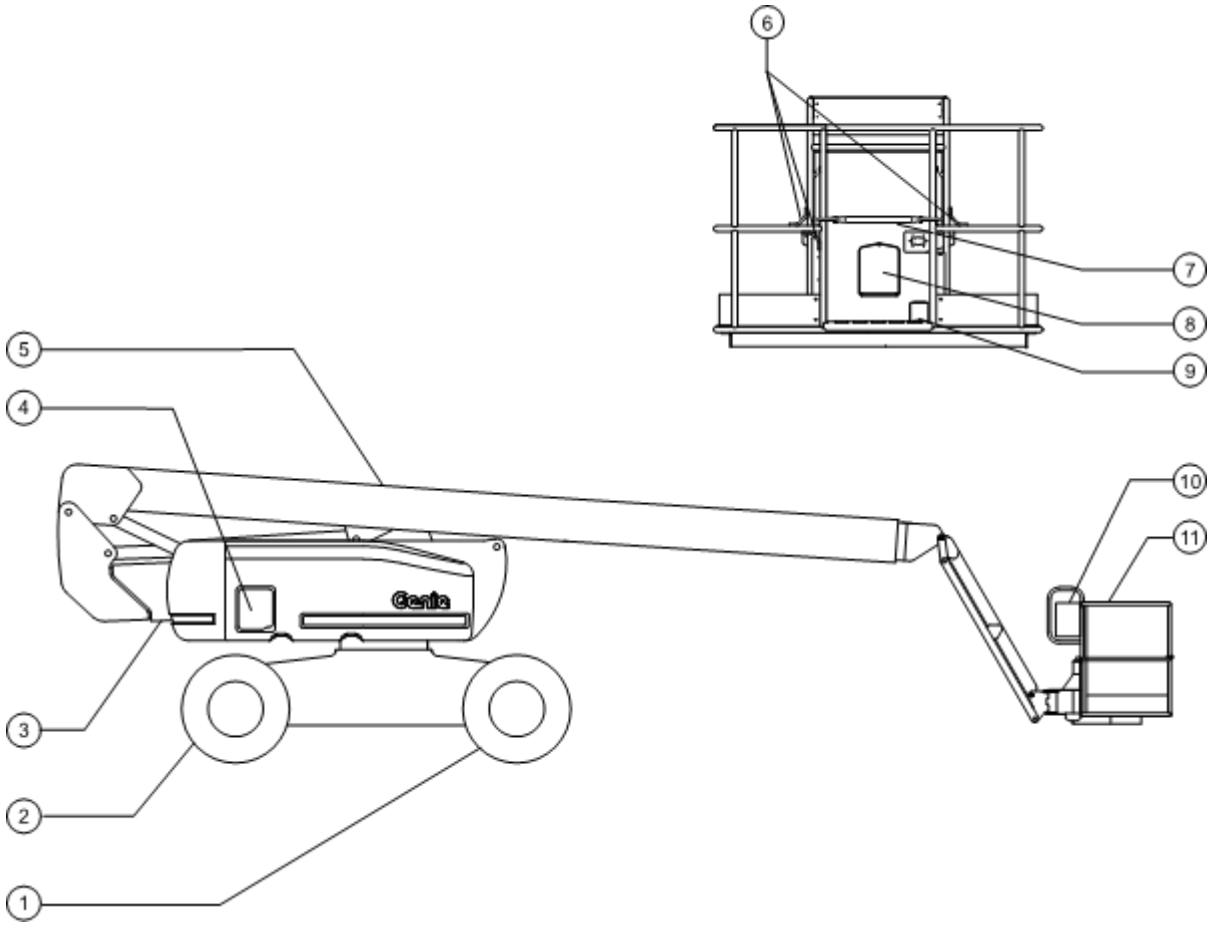

1 Circle-end tire
2 Square-end tire
3 Secondary boom
4 Ground controls
5 Primary boom
6 Lanyard anchorage points
7 Sliding mid-rail
8 Manual storage container
9 Foot switch
10 Platform controls
11 Platform

Controls

The ground control station is to be used as a means to raise the platform for storage purposes and for function tests. The ground control station can be used in the event of an emergency to rescue an incapacitated person in the platform. When the ground control station is selected, the platform controls are inoperable, including the E-stop switch.

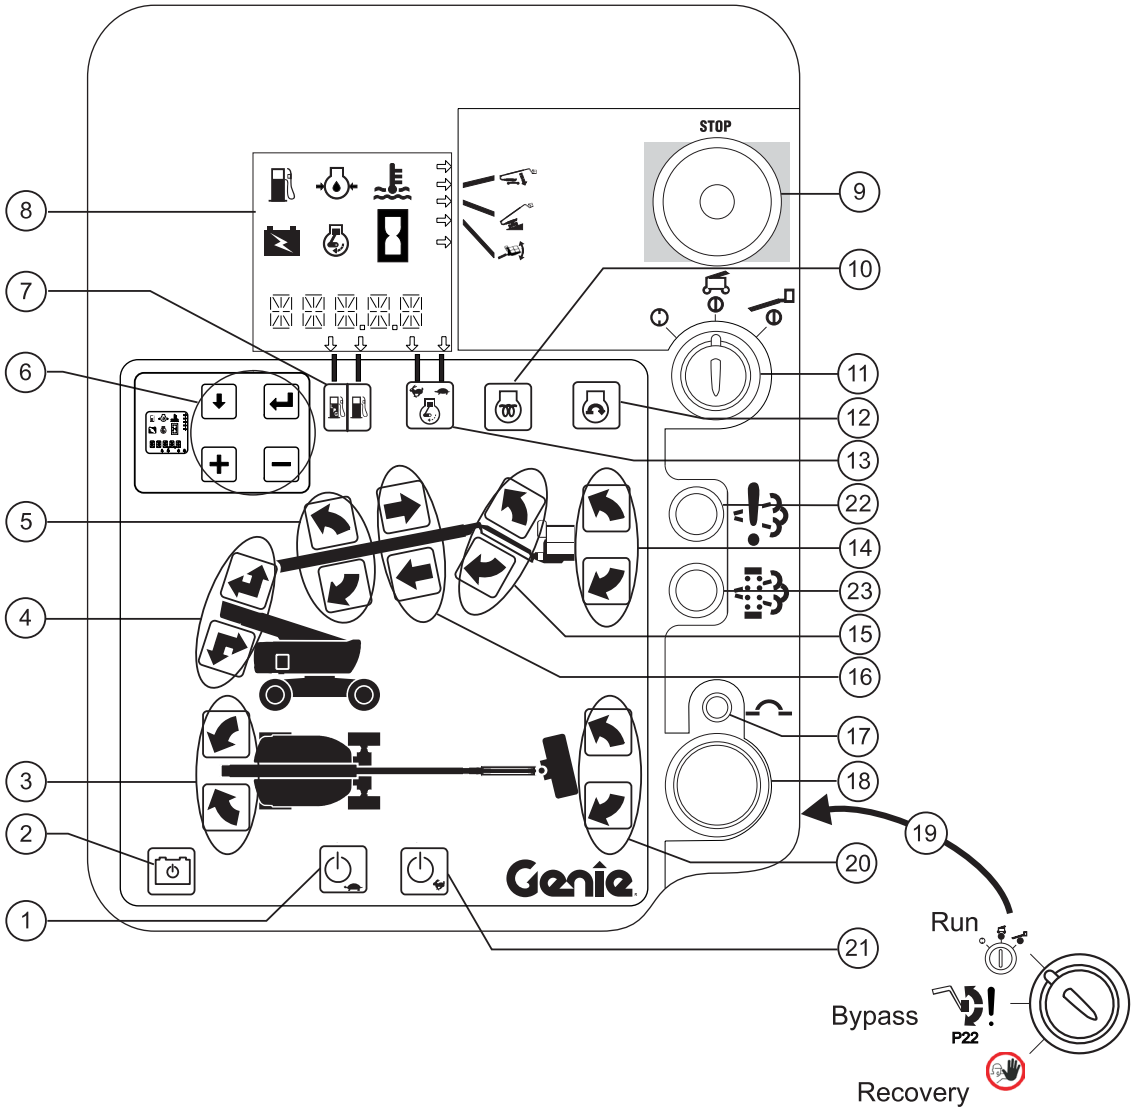

Ground Control Panel

1 Low speed function enable button

Press the low speed function enable button to enable the functions on the ground control panel to operate at low speed.

2 Auxiliary power switch

Use auxiliary power if the primary power source fails.

Simultaneously hold the auxiliary power switch on and activate the desired function.

3 Turntable rotate left/right buttons

Press the turntable rotate left button and the turntable will rotate to the left.

Press the turntable rotate right button and the turntable will rotate to the right.

4 Secondary boom up/extend and down/retract buttons

Push the secondary boom up/extend button and the secondary boom will raise and then extend. Push the secondary boom down/retract button and the secondary boom will retract and then lower.

5 Primary boom up/down buttons

Press the primary boom up button and the boom will raise. Press the primary boom down button and the boom will lower.

6 LCD screen control buttons

7 Gasoline/LPG models: fuel select button

Push the fuel select button to select the engine fuel source. When the arrow above the LPG tank is lit, the engine will run on LPG. When the arrow above the gas tank is lit, the engine will run on gasoline.

8 LCD readout screen



- a low fuel indicator
- b engine oil pressure indicator
- c water temperature indicator
- d auxiliary power indicator
- e engine rpm indicator
- f hour meter

9 Red Emergency Stop button

Push in the red Emergency Stop button to the off position to stop all functions and turn the engine off. Pull out the red Emergency Stop button to the on position to operate the machine.

10 Glow plug button (if equipped with manual glow plugs)

Controls

11 Key switch for off/ground/platform selection

Turn the key switch to the off position and the machine will be off. Turn the key switch to the ground position and the ground controls will operate. Turn the key switch to the platform position and the platform controls will operate.

12 Engine start button

Push the engine start button and the engine will start.

13 Engine speed select button

Press the engine speed select button to select the engine speed. When the arrow above the rabbit is lit, the engine is in high idle speed. When the arrow above the turtle is lit, the engine is in low idle speed.

14 Platform level up/down buttons

Press the platform level up button and the level of the platform will raise. Press the platform level down button and the level of the platform will lower.

15 Jib boom up/down buttons

Press the jib boom up button and the jib boom will raise. Press the jib boom down button and the jib boom will lower.

16 Primary boom extend/retract buttons

Press the primary boom extend button and the primary boom will extend. Press the primary boom retract button and the primary boom will retract.

17 20A circuit breaker for system circuit

18 Alarm

19 Bypass/recovery key switch

Bypass key position to be used only to level the platform if the ground control display shows platform out of level (P22) and platform level controls do not work. Refer to the operating instructions.

Recovery key position should be used only by trained and authorized personnel.

20 Platform rotate left/right buttons

Press the platform rotate left button and the platform will rotate left.

Press the platform rotate right button and the platform will rotate right.


21 High speed function enable button

Press the high speed function enable button to enable the functions on the ground control panel to operate at high speed.


22 Not used

23 Not used

Controls

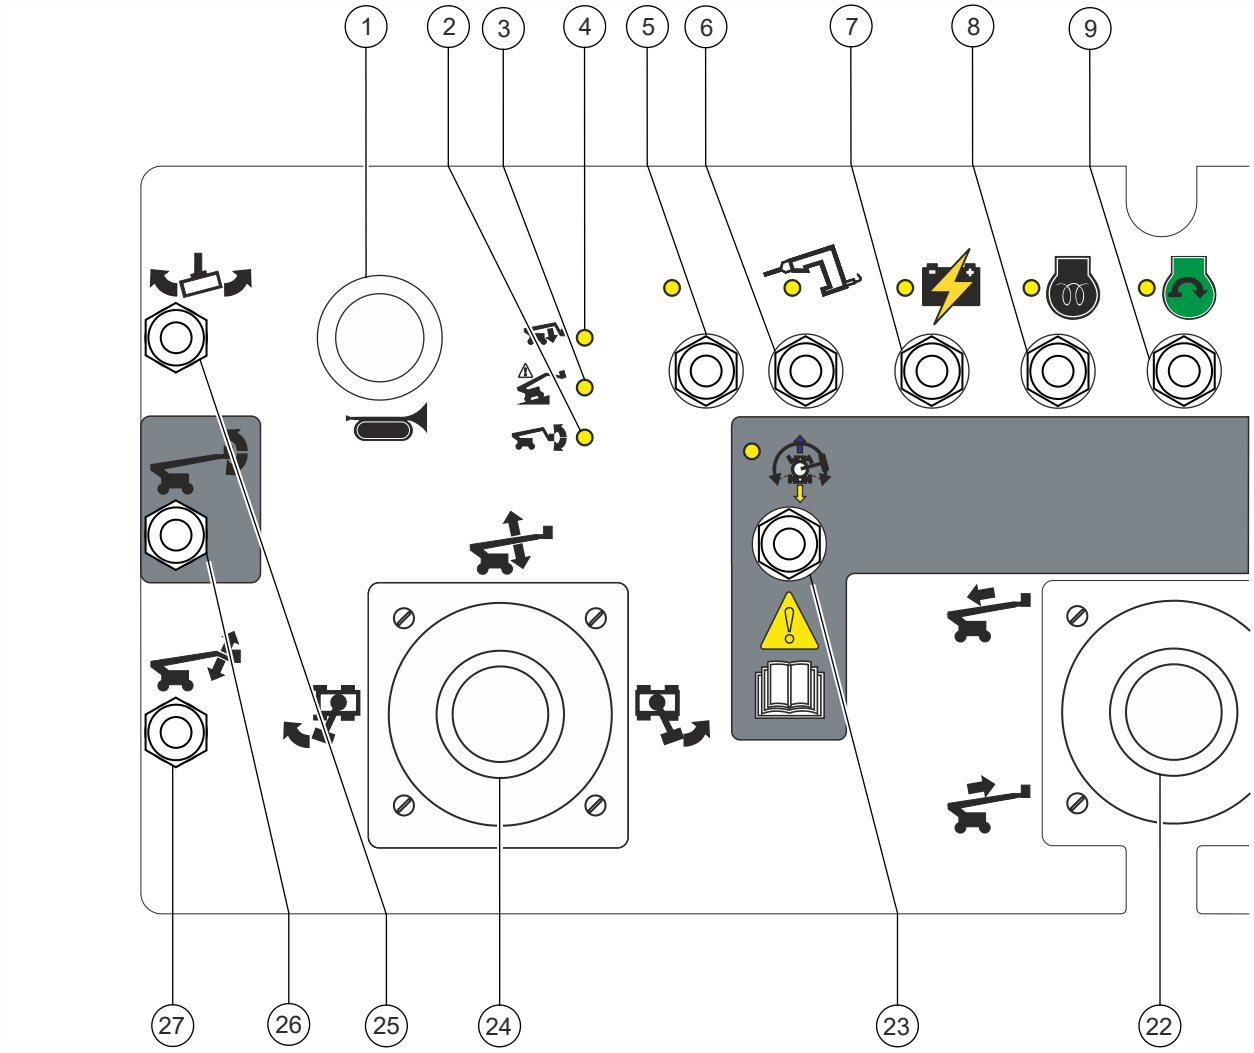

Controls

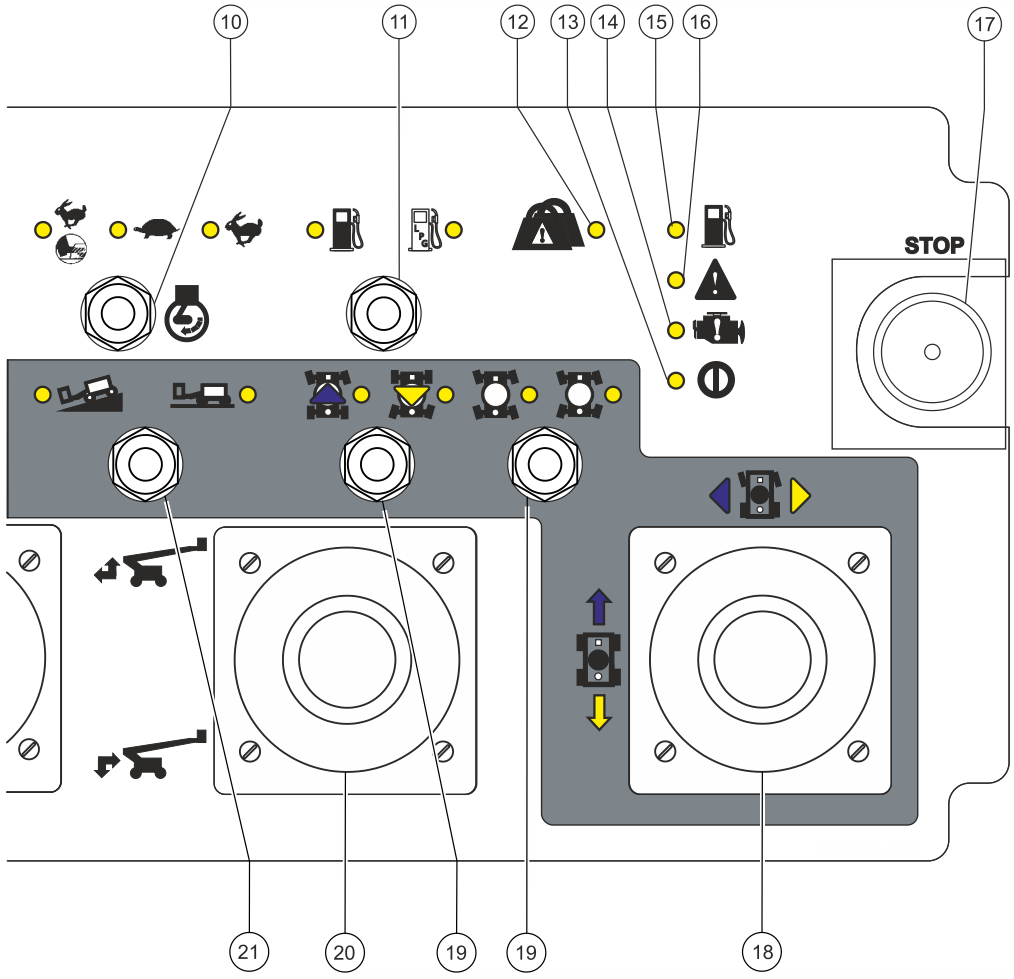

Controls

Platform Control Panel

1 Horn button

Press this button and the horn will sound. Release the button and the horn will stop.

2 Platform not level indicator light

Level the platform until the light is off. The platform level toggle switch will only work in the direction that will level the platform.

3 Machine on incline indicator light

Light on indicates all functions have stopped. See the instructions in the Operating Instructions section.

4 Lower primary boom indicator light

Lower the primary boom until the light is off.

5 Used for optional equipment

6 Generator control with indicator light (if equipped)

Move the switch or press the button to turn the generator on. Move the switch again or release the button to turn the generator off.

7 Auxiliary power switch with indicator light

Use auxiliary power if the primary power source (engine) fails.
Simultaneously hold the auxiliary power switch to either side and activate the desired function. The indicator light will be on when auxiliary power is being used.

8 Diesel models: Glow plug control with indicator light

Move the switch or push the button to activate the glow plugs.

Diesel models: Automatic glow plug indicator light

Amber light indicates glow plugs are on.

Gasoline/LPG models: Choke switch with indicator light (if equipped)

Move the switch to activate the choke.

9 Engine start control with indicator light

Move the switch or push the button to start the engine. The indicator light will be on when the switch is moved or the button is pushed.

10 Engine idle control with indicator light

Move the switch or push the button to select the engine idle setting. The indicator light next to the current engine idle setting will be on.

Controls

11 Gasoline/LPG models: Fuel select control with indicator light

Move the switch or push the button to select the fuel source. The indicator light next to the current fuel selection will be on.

12 Platform overload indicator light

Light flashing indicates the platform is overloaded. The engine will stop and no functions will operate. Remove weight until the light goes off and then restart the engine.

13 Power indicator light

Light on indicates the machine is on.

14 Check engine indicator light

Light on indicates an engine fault.

15 Low fuel indicator light

Light on indicates the machine is low on fuel.

16 Fault indicator light

Light on indicates a system fault.

17 Red Emergency Stop button

Push in the red Emergency Stop button to the off position to stop all functions and turn the engine off. Pull out the red Emergency Stop button to the on position to operate the machine.

18 Dual axis proportional control handle for drive and steer functions.
OR
Proportional control handle for drive function and thumb rocker for steer function.

Move the control handle in the direction indicated by the blue arrow on the control panel and the machine will drive forward. Move the control handle in the direction indicated by the yellow arrow and the machine will drive backwards. Move the control handle in the direction indicated by the blue triangle and the machine will steer to the left. Move the control handle in the direction indicated by the yellow triangle and the machine will steer to the right.
OR
Move the control handle in the direction indicated by the blue arrow on the control panel and the machine will drive forward. Move the control handle in the direction indicated by the yellow arrow and the machine will drive backwards. Press the left side of the thumb rocker and the machine will steer to the left. Press the right side of the thumb rocker and the machine will steer to the right.

19 Steer mode control with indicator lights

Move the switch or push the button to choose steer mode. The indicator light next to the current steer mode will be on.

20 Single axis proportional control handle for secondary boom up/extend and down/retract function

Move the control handle up and the secondary boom will raise and then extend. Move the control handle down and the secondary boom will retract and then lower.

21 Drive control with indicator lights

Move the switch or push the button to choose the drive setting. The indicator light next to the current setting will be on.

22 Single axis proportional control handle for primary boom extend/retract function

Move the control handle down and the boom will extend. Move the control handle up and the boom will retract.

23 Drive enable control with indicator light

Light on indicates that the primary boom has moved past either circle-end wheel and the drive function is turned off. To drive, move the drive enable switch or push the drive enable button and slowly move the drive control handle off center.

24 Dual axis proportional control handle for primary boom up/down and turntable rotate left/right functions

Move the control handle up and the primary boom will raise. Move the control handle down and the primary boom will lower.

Move the control handle to the right and the turntable will rotate to the right. Move the control handle to the left and the turntable will rotate to the left.

25 Platform rotate switch

Move the platform rotate switch to the right and the platform will rotate to the right. Move the platform rotate switch to the left and the platform will rotate to the left.

26 Platform level switch

Move the platform level switch up and the level of the platform will raise. Move the platform level switch down and the level of the platform will lower.

27 Jib boom up/down switch

Move the jib boom switch up and the jib boom will raise. Move the jib boom switch down and the jib boom will lower.

Inspections



Do Not Operate Unless:

☑ You learn and practice the principles of safe machine operation contained in this operator's manual.

1 Avoid hazardous situations.

2 Always perform a pre-operation inspection.

Know and understand the pre-operation inspection before going on to the next section.

3 Always perform function tests prior to use.

4 Inspect the workplace.

5 Only use the machine as it was intended.

Pre-operation Inspection Fundamentals

It is the responsibility of the operator to perform a pre-operation inspection and routine maintenance.

The pre-operation inspection is a visual inspection performed by the operator prior to each work shift or change of operator. The inspection is designed to discover if anything is apparently wrong with a machine before the operator performs the function tests.

The pre-operation inspection also serves to determine if routine maintenance procedures are required. Only routine maintenance items specified in this manual may be performed by the operator.

Refer to the list on the next page and check each of the items.

If damage or any unauthorized variation from factory delivered condition is discovered, the machine must be tagged and removed from service.

Repairs to the machine may only be made by a qualified service technician, according to the manufacturer's specifications. After repairs are completed, the operator must perform a pre-operation inspection again before going on to the function tests.

Scheduled maintenance inspections shall be performed by qualified service technicians, according to the manufacturer's specifications and the requirements listed in the responsibilities manual.

Obey all local and governmental regulations regarding examinations and tests.

Inspections

Pre-operation Inspection

- ❑ Be sure that the operator's, safety, and responsibilities manuals are complete, legible and in the storage container located in the platform.
- ❑ Be sure that all decals are legible and in place. See Inspections section.
- ❑ Check for hydraulic oil leaks and proper oil level. Add oil if needed. See Maintenance section.
- ❑ Check for battery fluid leaks and proper fluid level. Add distilled water if needed. See Maintenance section.
- ❑ Check for engine oil leaks and proper oil level. Add oil if needed. See Maintenance section.
- ❑ Check for engine coolant leaks and proper level of coolant. Add coolant if needed. See Maintenance section.
- ❑ Check air-filled tires for proper tire pressure. Add air if needed. See Maintenance section.

Check the following components or areas for damage, improperly installed, or missing parts and unauthorized modifications:

- ❑ Electrical components, wiring, and electrical cables
- ❑ Hydraulic hoses, fittings, cylinders, and manifolds
- ❑ Fuel and hydraulic tanks
- ❑ Drive and turntable motors and drive hubs
- ❑ Wear pads
- ❑ Tires and wheels
- ❑ Engine and related components
- ❑ Limit switches and horn
- ❑ Alarms and beacons (if equipped)
- ❑ Nuts, bolts and other fasteners
- ❑ Platform entry mid-rail or gate

Check entire machine for:

- ❑ Cracks in welds or structural components
- ❑ Dents or damage to machine
- ❑ Excessive rust, corrosion or oxidation

- ❑ Verify that all structural and other critical components are present and all associated fasteners and pins are in place and properly tightened.
- ❑ After you complete your inspection, be sure that all compartment covers are in place and latched.

Inspections



Do Not Operate Unless:

☑ You learn and practice the principles of safe machine operation contained in this operator's manual.

1 Avoid hazardous situations.

2 Always perform a pre-operation inspection.

3 Always perform function tests prior to use.

Know and understand the function tests before going on to the next section.

4 Inspect the workplace.

5 Only use the machine as it was intended.

Function Test Fundamentals

The function tests are designed to discover any malfunctions before the machine is put into service. The operator must follow the step-by-step instructions to test all machine functions.

A malfunctioning machine must never be used. If malfunctions are discovered, the machine must be tagged and removed from service. Repairs to the machine may only be made by a qualified service technician, according to the manufacturer's specifications.

After repairs are completed, the operator must perform a pre-operation inspection and function tests again before putting the machine into service.

Inspections

At the Ground Controls

1 Select a test area that is firm, level and free of hazards.

2 Turn the key switch to ground control.

3 Pull out the red Emergency Stop button to the on position.

⊙ Result: The beacons (if equipped) should flash.

4 Start the engine. See Operating Instructions section.

Test Emergency Stop

5 Push in the red Emergency Stop button to the off position.

⊙ Result: The engine should shut off and no functions should operate.

6 Pull out the red Emergency Stop button to the on position and restart the engine.

Test Machine Functions

7 Do not press and hold a function enable/speed select button. Attempt to activate each boom and platform function button.



⊙ Result: No boom and platform functions should operate.

8 Press and hold a function enable/speed select button and activate each boom and platform function button.


⊙ Result: All boom and platform functions should operate through a full cycle. The descent alarm should sound while the boom is lowering.

Test Auxiliary Controls

9 Push in the red Emergency Stop button to the off position to shut off the engine.

10 Pull out the red Emergency Stop button to the on position.

11 Simultaneously push and hold the auxiliary power button and push each boom function button.



Note: To conserve battery power, test each function through a partial cycle.

⊙ Result: All boom functions should operate.

12 Start the engine.

Inspections

Test the Tilt Sensor

13 Press one of the LCD screen control buttons until TURNTABLE LEVEL SENSOR X-DIRECTION appears.




⊙ Result: The LCD screen should display the angle in degrees.

14 Press the LCD screen control buttons until TURNTABLE LEVEL SENSOR Y-DIRECTION appears.

⊙ Result: The LCD screen should display the angle in degrees.

15 Press the LCD screen control buttons until PLATFORM LEVEL SENSOR DEGREES appears.

⊙ Result: The LCD screen should display the angle in degrees.

Test the Operating Envelope

16 Press the LCD screen control buttons shown until PRI BOOM ANGLE TO GRAVITY is displayed.




17 Raise the primary boom and observe the LCD screen.

⊙ Result: The primary boom should raise and the
LCD screen should display the primary boom angle in degrees from 35 to 65. The primary boom should stop when the screen reads 65 degrees.

18 Lower the primary boom.

19 Simultaneously press the 2 LCD screen control buttons shown to activate status mode.




20 Press the LCD screen control buttons shown until SEC BOOM ANGLE is displayed.




21 Press and hold the secondary boom up/extend button.

⊙ Result: The secondary boom should raise and the LCD screen should display:

=0

>0

>35

=65

The secondary boom should raise and then extend. The secondary boom should not extend until it is fully raised.

22 Press and hold the secondary boom down/retract button.

⊙ Result: The secondary boom should fully retract and then lower. The secondary boom should not lower unless it is fully retracted.

At the Platform Controls

Test Emergency Stop

23 Turn the key switch to platform control.

24 Push in the platform red Emergency Stop button to the off position.

⊙ Result: The engine should shut off and no functions should operate.

25 Pull out the red Emergency Stop button and restart the engine.

Test the Hydraulic Return Filter

26 Press the engine idle speed select button or move the switch until the indicator light next to the high idle (rabbit symbol) is on.

27 Locate and check the hydraulic filter condition indicator.

⊙ Result: The filter should be operating with the plunger or the needle in the green area.

28 Press the engine idle speed select button or move the switch until the indicator light next to the foot switch activated high idle (rabbit and foot switch symbol) is on.

Test the Horn

29 Press the horn button.

⊙ Result: The horn should sound.

Test the Tilt Sensor Alarm

30 Push a button or move a switch, such as the engine idle select.

⊙ Result: The alarm should sound at the platform controls.

Test the Foot Switch

31 Push in the platform red Emergency Stop button to the off position.

32 Pull out the red Emergency Stop button to the on position and do not start the engine.

33 Press down the foot switch and attempt to start the engine.

⊙ Result: The engine should not start.

34 Do not press down the foot switch and restart the engine.

⊙ Result: The engine should start.

35 Do not press down the foot switch and test each machine function.

⊙ Result: No functions should operate.

Test Machine Functions

36 Press down the foot switch.

37 Activate each machine function control handle, toggle switch or button.

⊙ Result: All functions should operate through a full cycle.

Inspections

Test the Steering (models with 4 wheel steer)

38 Select square-end (blue arrow) steer. Push the square-end (blue arrow) steer button or move the steer mode switch.



39 Press down the foot switch.

40 Slowly move the drive control handle in the direction indicated by the blue triangle on the control panel OR press the thumb rocker switch in the direction indicated by the blue triangle.

⊙ Result: The square-end wheels should turn in the direction that the blue triangles point on the drive chassis.

41 Slowly move the control handle in the direction indicated by the yellow triangle on the control panel OR press the thumb rocker switch in the direction indicated by the yellow triangle.

⊙ Result: The square-end wheels should turn in the direction that the yellow triangles point on the drive chassis.

42 Select circle-end (yellow arrow) steer. Push the circle-end (yellow arrow) steer button or move the steer select switch.



43 Press down the foot switch.

44 Slowly move the control handle in the direction indicated by the yellow triangle on the control panel OR press the thumb rocker switch in the direction indicated by the yellow triangle.

⊙ Result: The circle-end wheels should turn in the direction that the blue triangles point on the drive chassis.

45 Slowly move the drive control handle in the direction indicated by the blue triangle on the control panel OR press the thumb rocker switch in the direction indicated by the blue triangle.

⊙ Result: The circle-end wheels should turn in the direction that the yellow triangles point on the drive chassis.

46 Select crab steer. Push the crab steer button or move the steer mode switch.



47 Press down the foot switch.

48 Slowly move the drive control handle in the direction indicated by the blue triangle on the control panel OR press the thumb rocker switch in the direction indicated by the blue triangle.

⊙ Result: All wheels should turn in the direction that the blue triangles point on the drive chassis.

49 Slowly move the control handle in the direction indicated by the yellow triangle on the control panel OR press the thumb rocker switch in the direction indicated by the yellow triangle.

⊙ Result: All wheels should turn in the direction that the yellow triangles point on the drive chassis.

50 Select coordinated steer. Push the coordinated steer button or move the steer mode switch.



51 Press down the foot switch.

52 Slowly move the drive control handle in the direction indicated by the blue triangle on the control panel OR press the thumb rocker switch in the direction indicated by the blue triangle.

⊙ Result: The square-end wheels should turn in the direction that the blue triangles point on the drive chassis. The circle-end wheels should turn in the direction that the yellow triangles point on the drive chassis.

53 Slowly move the control handle in the direction indicated by the yellow triangle on the control panel OR press the thumb rocker switch in the direction indicated by the yellow triangle.

⊙ Result: The square-end wheels should turn in the direction that the blue triangles point on the drive chassis. The circle-end wheels should turn in the direction that the yellow triangles point on the drive chassis.

Test the Steering (models with 2 wheel steer)

54 Press down the foot switch.

55 Press the thumb rocker switch on top of the drive control handle in the direction indicated by the blue triangle on the control panel OR slowly move the control handle in the direction indicated by the blue triangle.

⊙ Result: The steer wheels should turn in the direction that the blue triangles point on the drive chassis.

56 Press the thumb rocker switch in the direction indicated by the yellow triangle on the control panel OR slowly move the control handle in the direction indicated by the yellow triangle.

⊙ Result: The steer wheels should turn in the direction that the yellow triangles point on the drive chassis.

Inspections

Test Drive and Braking

57 Press down the foot switch.

58 Slowly move the drive control handle in the direction indicated by the blue arrow on the control panel until the machine begins to move, then return the handle to the center position.

⊙ Result: The machine should move in the direction that the blue arrow points on the drive chassis, then come to an abrupt stop.

59 Slowly move the control handle in the direction indicated by the yellow arrow on the control panel until the machine begins to move, then return the handle to the center position.

⊙ Result: The machine should move in the direction that the yellow arrow points on the drive chassis, then come to an abrupt stop.

Note: The brakes must be able to hold the machine on any slope it is able to climb.

Test the Oscillating Axle (if equipped)

60 Start the engine from the platform controls.

61 Drive the right square-end tire up onto a 6 in / 15 cm block or curb.

⊙ Result: The three remaining tires should stay in firm contact with the ground.

62 Drive the left square-end tire up onto a 6 in / 15 cm block or curb.

⊙ Result: The three remaining tires should stay in firm contact with the ground.

63 Drive both square-end tires up onto a 6 in / 15 cm block or curb.

⊙ Result: The circle-end tires should stay in firm contact with the ground.

Test the Drive Enable System

64 Press down the foot switch and lower the boom to the stowed position.

65 Rotate the turntable until the primary boom moves past one of the circle-end tires.

⊙ Result: The drive enable indicator light should come on and remain on while the boom is anywhere in the range shown.



66 Move the drive control handle off center.


⊙ Result: The drive function should not operate.

67 Push the drive enable button or move the switch and slowly move the drive control handle off center.

⊙ Result: The drive function should operate.

Note: When the drive enable system is in use, the machine may drive in the opposite direction that the drive and steer control handle is moved.

Use the color-coded direction arrows on the platform controls and the drive chassis to identify the direction of travel.



If the drive control handle is not moved within two seconds of moving the drive enable toggle switch, the drive function will not operate.

Test Limited Drive Speed

68 Press down the foot switch.

69 Raise the primary boom to 10° above horizontal.

70 Slowly move the drive control handle to the full drive position.

⊙ Result: The maximum achievable drive speed with the primary boom raised should not exceed 1 ft / 30 cm per second.

Note: Models with foam-filled tires will travel 40 ft / 12 m in 40 seconds. Models with high-flotation tires will travel 40 ft / 12 m in 62 seconds.

71 Lower the primary boom to the stowed position.

72 Extend the primary boom 4 ft / 1.2 m.

73 Slowly move the drive control handle to the full drive position.

⊙ Result: The maximum achievable drive speed with the primary boom extended should not exceed 1 ft/30 cm per second.

Note: The machine will travel 40 ft / 12 m in 40 seconds.

74 Retract the primary boom to the stowed position.

75 Raise the secondary boom to 10° above horizontal.

76 Slowly move the drive control handle to the full drive position.

⊙ Result: The maximum achievable drive speed with the secondary boom raised should not exceed 1 ft / 30 cm per second.

Note: Models with foam-filled tires will travel 40 ft / 12 m in 40 seconds. Models with high-flotation tires will travel 40 ft / 12 m in 62 seconds.

77 Lower the secondary boom to the stowed position.

If the drive speed with the primary or secondary boom raised or the primary boom extended exceeds 1 ft/30 cm per second, immediately tag and remove the machine from service.

Test Drive Tilt Cutout

78 Press down the foot switch.

79 With the boom fully stowed, drive the machine onto a slope where the chassis angle is greater than 4.5° along the Y-Axis (front to back).

⊙ Result: The machine should continue to drive.

80 Return to level ground and raise the primary boom to approximately 10° above horizontal.

81 Drive the machine onto a slope where the chassis angle is greater than 4.5° along the Y-Axis (front to back).

⊙ Result: The machine should stop once the machine reaches 4.5° of chassis tilt and the alarm should sound at the platform controls.

Inspections

82 Lower the primary boom to the stowed position or drive in the opposite direction.

⊙ Result: The alarm should turn off and the machine should drive.

83 Return to level ground and extend the primary boom approximately 4 ft / 1.2 m.

84 Drive the machine onto a slope where the chassis angle is greater than 4.5° along the Y-Axis (front to back).

⊙ Result: The machine should stop once the machine reaches 4.5° of chassis tilt and the alarm should sound at the platform controls.

85 Retract the primary boom to the stowed position or drive in the opposite direction.

⊙ Result: The machine should drive.

86 Return to level ground and stow the boom.

87 With the boom fully stowed, drive the machine onto a slope where the chassis angle is greater than 4.5° along the Y-Axis (front to back).

⊙ Result: The machine should continue to drive.

88 Return to level ground and raise the secondary boom to approximately 10° above horizontal.

89 Drive the machine onto a slope where the chassis angle is greater than 4.5° along the Y-Axis (front to back).

⊙ Result: The machine should stop once the machine reaches 4.5° of chassis tilt and the alarm should sound at the platform controls.

90 Lower the secondary boom to the stowed position or drive in the opposite direction.

⊙ Result: The alarm should turn off and the machine should drive.

91 With the boom fully stowed, drive the machine onto a slope where the chassis angle is greater than 4.5° along the X-Axis (side to side).

⊙ Result: The machine should continue to drive.

92 Return to level ground and raise the primary boom to approximately 10° above horizontal.

93 Drive the machine onto a slope where the chassis angle is greater than 4.5° along the X-Axis (side to side).

⊙ Result: The machine should stop once the machine reaches 4.5° of chassis tilt and the alarm should sound at the platform controls.

94 Lower the primary boom to the stowed position or drive in the opposite direction.

⊙ Result: The alarm should turn off and the machine should drive.

95 Return to level ground and extend the primary boom approximately 4 ft / 1.2 m.

96 Drive the machine onto a slope where the chassis angle is greater than 4.5° along the X-Axis (side to side).

⊙ Result: The machine should stop once the machine reaches 4.5° of chassis tilt and the alarm should sound at the platform controls.

97 Retract the primary boom to the stowed position or drive in the opposite direction.

⊙ Result: The alarm should turn off and the machine should drive.

98 Return to level ground and stow the boom.

99 With the boom fully stowed, drive the machine onto a slope where the chassis angle is greater than 4.5° along the X-Axis (side to side).

⊙ Result: The machine should continue to drive.

100 Return to level ground and raise the secondary boom to approximately 10° above horizontal.

101 Drive the machine onto a slope where the chassis angle is greater than 4.5° along the X-Axis (side to side).

⊙ Result: The machine should stop once the machine reaches 4.5° of chassis tilt and the alarm should sound at the platform controls.

102 Lower the secondary boom to the stowed position or drive in the opposite direction.

⊙ Result: The alarm should turn off and the machine should drive.

Test the Platform Level Recovery

103 Press down the foot switch.

104 Push and hold the platform level recovery switch up.

105 Move the platform level switch up and the level of the platform will raise.

⊙ Result: The platform should return to a level position.

106 Move the platform level switch down and the level of the platform will lower.

⊙ Result: The platform should return to a level position.

Note: The platform level switch will only work in the direction that will return the platform to a level position.

Test Auxiliary Controls

107 Push in the red Emergency Stop button to the off position to shut off the engine.

108 Pull out the red Emergency Stop button to the on position.

109 Press down the foot switch.

110 Activate the auxiliary controls. Move and hold the switch or push and hold the button. Activate each function control handle, toggle switch or thumb rocker switch.

Note: To conserve battery power, test each function through a partial cycle.

⊙ Result: All boom and steer functions should operate.

Inspections

Test Aircraft Protection Package (if equipped)

Note: Two people may be required to perform this test.

111 Move the yellow bumper at the bottom of the platform 4 inches/10 cm in any direction.

112 Activate each function control handle or toggle switch.

⊙ Result: No boom and steer functions should operate.

113 Activate the function override. Move and hold the switch or push and hold the button.

114 Activate each function control handle or toggle switch.

⊙ Result: All boom and steer functions should operate.

Test the Contact Alarm (if equipped)

115 Do not activate the foot switch and press on the contact alarm cable to release the actuator from the switch socket.

⊙ Result: The contact alarm lights will not flash and the machine horn will not sound.

116 Activate the foot switch by pressing the foot switch down.

⊙ Result: The contact alarm lights will flash and the machine horn will sound.

117 Insert the actuator into the switch socket.

⊙ Result: The lights and horn will turn off.

118 Activate the foot switch by pressing the foot switch down and press on the contact alarm cable to release the actuator from the switch socket.

⊙ Result: The contact alarm lights will flash and the machine horn will sound.

119 Operate each machine function.


⊙ Result: All machine functions should not operate.

120 Insert the actuator into the switch socket.

⊙ Result: The lights and horn will turn off.

121 Operate each machine function.

⊙ Result: All machine functions should operate.

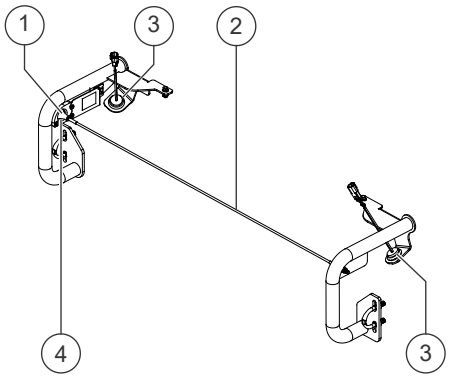

1 actuator
2 contact alarm cable
3 flashing alarm
4 switch socket

Test the Lift/Drive Select Function

122 Press down the foot switch.

123 Move the drive control handle off center and activate a boom function. Push a boom function button or move a boom function switch.

⊙ Result: No boom functions should operate. The machine will move in the direction indicated on the control panel.

Inspections



Do Not Operate Unless:

☑ You learn and practice the principles of safe machine operation contained in this operator's manual.

1 Avoid hazardous situations.

2 Always perform a pre-operation inspection.

3 Always perform function tests prior to use.

4 Inspect the workplace.

Know and understand the workplace inspection before going on to the next section.

5 Only use the machine as it was intended.

Workplace Inspection Fundamentals

The workplace inspection helps the operator determine if the workplace is suitable for safe machine operation. It should be performed by the operator prior to moving the machine to the workplace.

It is the operator's responsibility to read and remember the workplace hazards, then watch for and avoid them while moving, setting up, and operating the machine.

Workplace Inspection Checklist

Be aware of and avoid the following hazardous situations:

- ❑ drop-offs or holes
- ❑ bumps, floor obstructions, or debris
- ❑ sloped surfaces
- ❑ unstable or slippery surfaces
- ❑ overhead obstructions and high voltage conductors
- ❑ hazardous locations
- ❑ inadequate surface support to withstand all load forces imposed by the machine
- ❑ wind and weather conditions
- ❑ the presence of unauthorized personnel
- ❑ other possible unsafe conditions

Inspections

Inspection for Decals with Words

Determine whether the decals on your machine have words or symbols. Use the appropriate inspection to verify that all decals are legible and in place.

Below is a numerical list with quantities and descriptions.

Part No.	Decal Description	Qty
25994	Notice – Component Damage Hazard	1
27204	Arrow – Blue	1
27205	Arrow – Yellow	1
27206	Triangle – Blue	2
27207	Triangle – Yellow	2
28158	Label – Unleaded*	1
28159	Label – Diesel*	1
28160	Label – Liquid Petroleum Gas*	1
28174	Label – Power to Platform, 230V*	4
28235	Label – Power to Platform, 115V*	4
28236	Warning – Improper Operation	1
31060	Danger – Tip-over Hazard, Limit Switch	7
31788	Danger – Explosion/Burn Hazard	1
38149	Label – Patent	1
44981	Label – Air Line to Platform*	2
52475	Label – Transport Tie Down**	6
52865	Warning – Annual Inspection Record	1
65278	Caution – No Step**	4
72086	Label – Lifting Point**	7
72168	Label – Starter Battery	1
72169	Label – Controls Battery	1
72875	Warning – Pipe Cradle (option)***	2
82237	Danger – Electrocution Hazard (option)*	4
82366	Label – Chevron Rando*	1
82422	Label – Lights*	1
82862	Danger – Fire Extinguisher, Welder (option)*	1
97579	Danger – Tip-over Welder (option)*	1
97602	Warning – Explosion Hazard	1
97815	Label – Lower Mid-rail	1
114236	Label – CB Symbol*	1
114258	Danger – Explosion Hazard	1
114390	Danger – Electrocution Hazard	3
122864	Label – Fuse and Relay Panel	1

Shading indicates decal is hidden from view, i.e. under covers


* These decals are model, option or configuration specific.

** These decals are installed on both sides of chassis.

*** These decals are installed on both sides of chassis and are model, option, or configuration specific.

Continued on next page.

Inspections

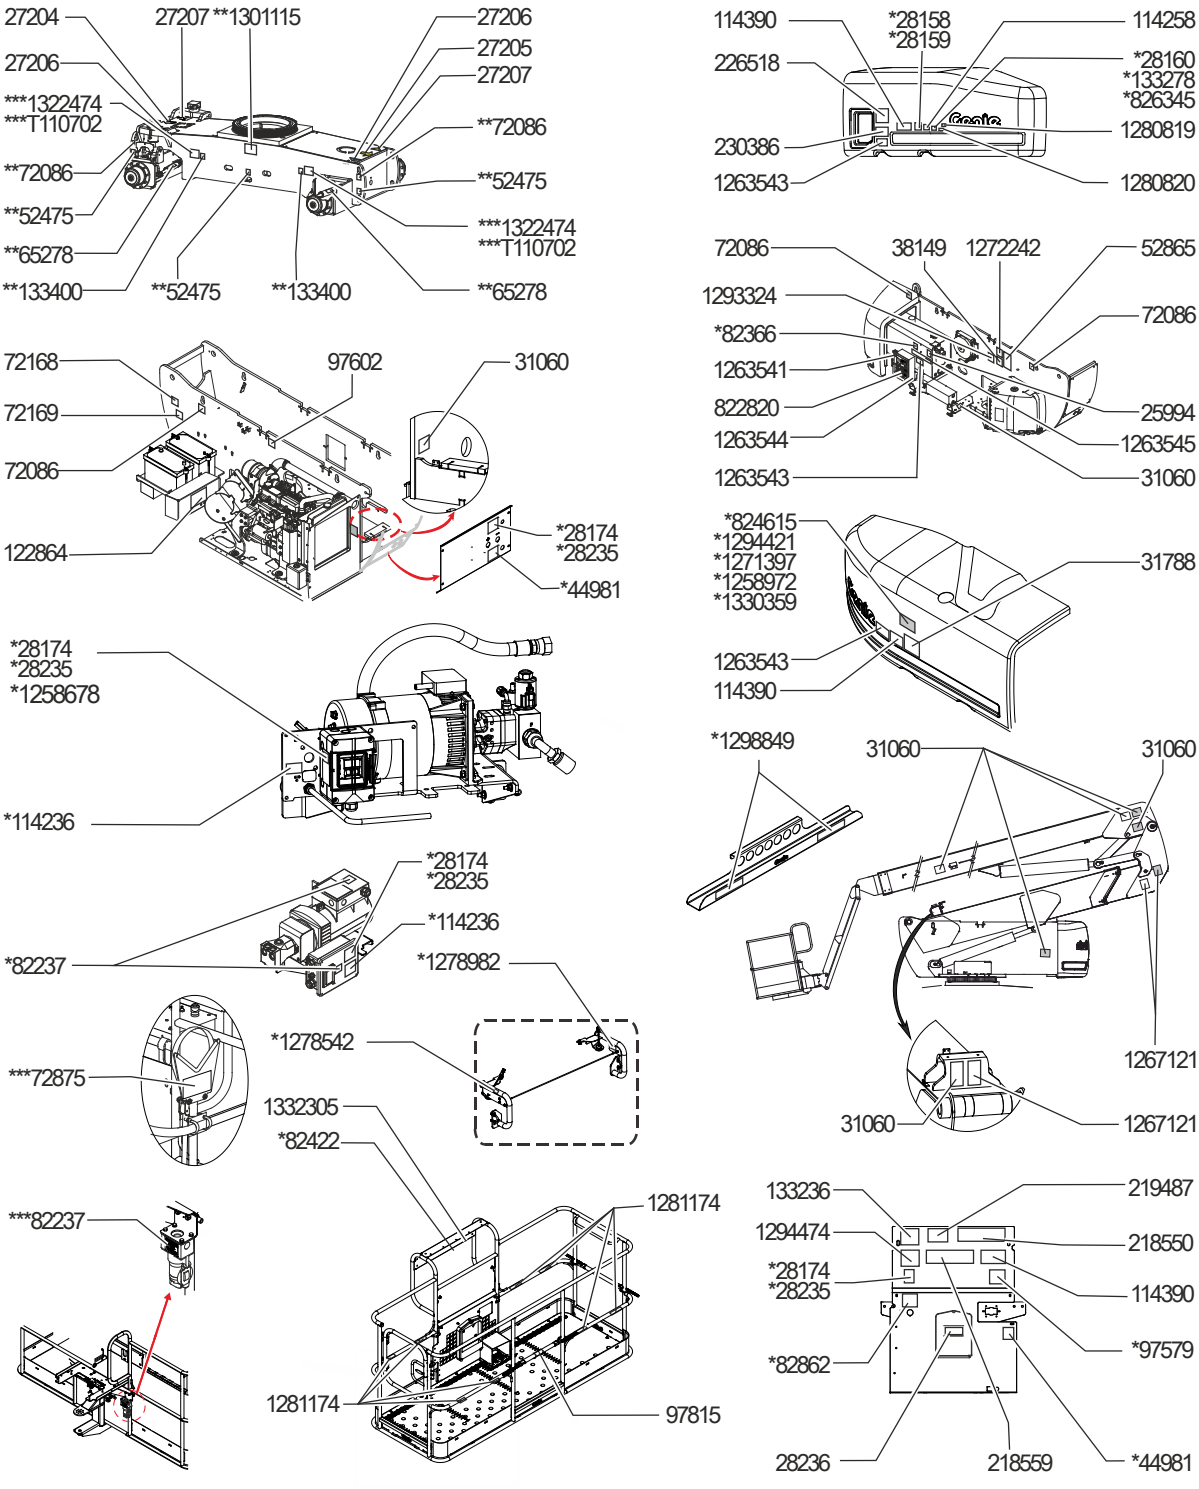

Inspections

Inspection for Decals with Words

Continued from previous page.

Below is a numerical list with quantities and descriptions.

Part No.	Decal Description	Qty
133236	Danger – Tip-over Hazard	1
133278	Label – Low Sulfur Fuel (diesel models)*	1
133400	Label – Wheel Load**	4
218550	Danger – Tip-over Hazard, 500 lbs / 227 kg	1
218559	Danger, Warning – Tip-over, Crush Hazard	1
219487	Label – Platform Overload	1
226518	Instructions – Operating Instructions	1
230386	Label – Emergency Lowering	1
822820	Ground Control Panel	1
824615	Instructions – Deutz Engine Specs, T4*	1
826345	Label – Ultra Low Sulfur Fuel Only (diesel models)*	1
1258678	Label – Power to Platform, 220V/60Hz*	1
1258972	Instructions – Perkins Engine Specs, 404D-22T*	1
1263541	Warning – Tip-over Hazard	1
1263543	Warning – Compartment Access	3
1263544	Bypass Key Switch	1
1263545	Instructions – Bypass Key Switch	1
1267121	Warning – Crush Hazard, Service	3
1271397	Instructions – GM 3.0L Engine*	1
1272242	Label – Machine Registration/Owner Transfer	1
1278542	Label – Contact Alarm Weight*	1
1278982	Label – Actuator Switch Socket*	1
1280819	Label – Warning, Prop 65	1
1280820	Label – Fuel, Diesel Exhaust, Prop 65	1
1281174	Label – Lanyard Anchorage Point, Fall Arrest/Fall Restrained	8
1293324	Label – ICES-2/CAN-2 Compliance	1
1294421	Instructions – Engine Specs, 404F-E22TA*	1
1294474	Label – Slope Rating, Z-80	1
1298849	Danger – Panel Cradle (option)*	1
1301115	Label – Transport Diagram**	2
1322474	Danger/Label – Tire Specifications***	4
1330359	Instructions – Deutz Engine Specs*	1
1332305	Platform Control Panel	1
T110702	Danger/Label – Tire Specifications, Solid Rubber***	4


Shading indicates decal is hidden from view, i.e. under covers

* These decals are model, option or configuration specific.

** These decals are installed on both sides of chassis.

*** These decals are installed on both sides of chassis and are model, option, or configuration specific.

Inspections

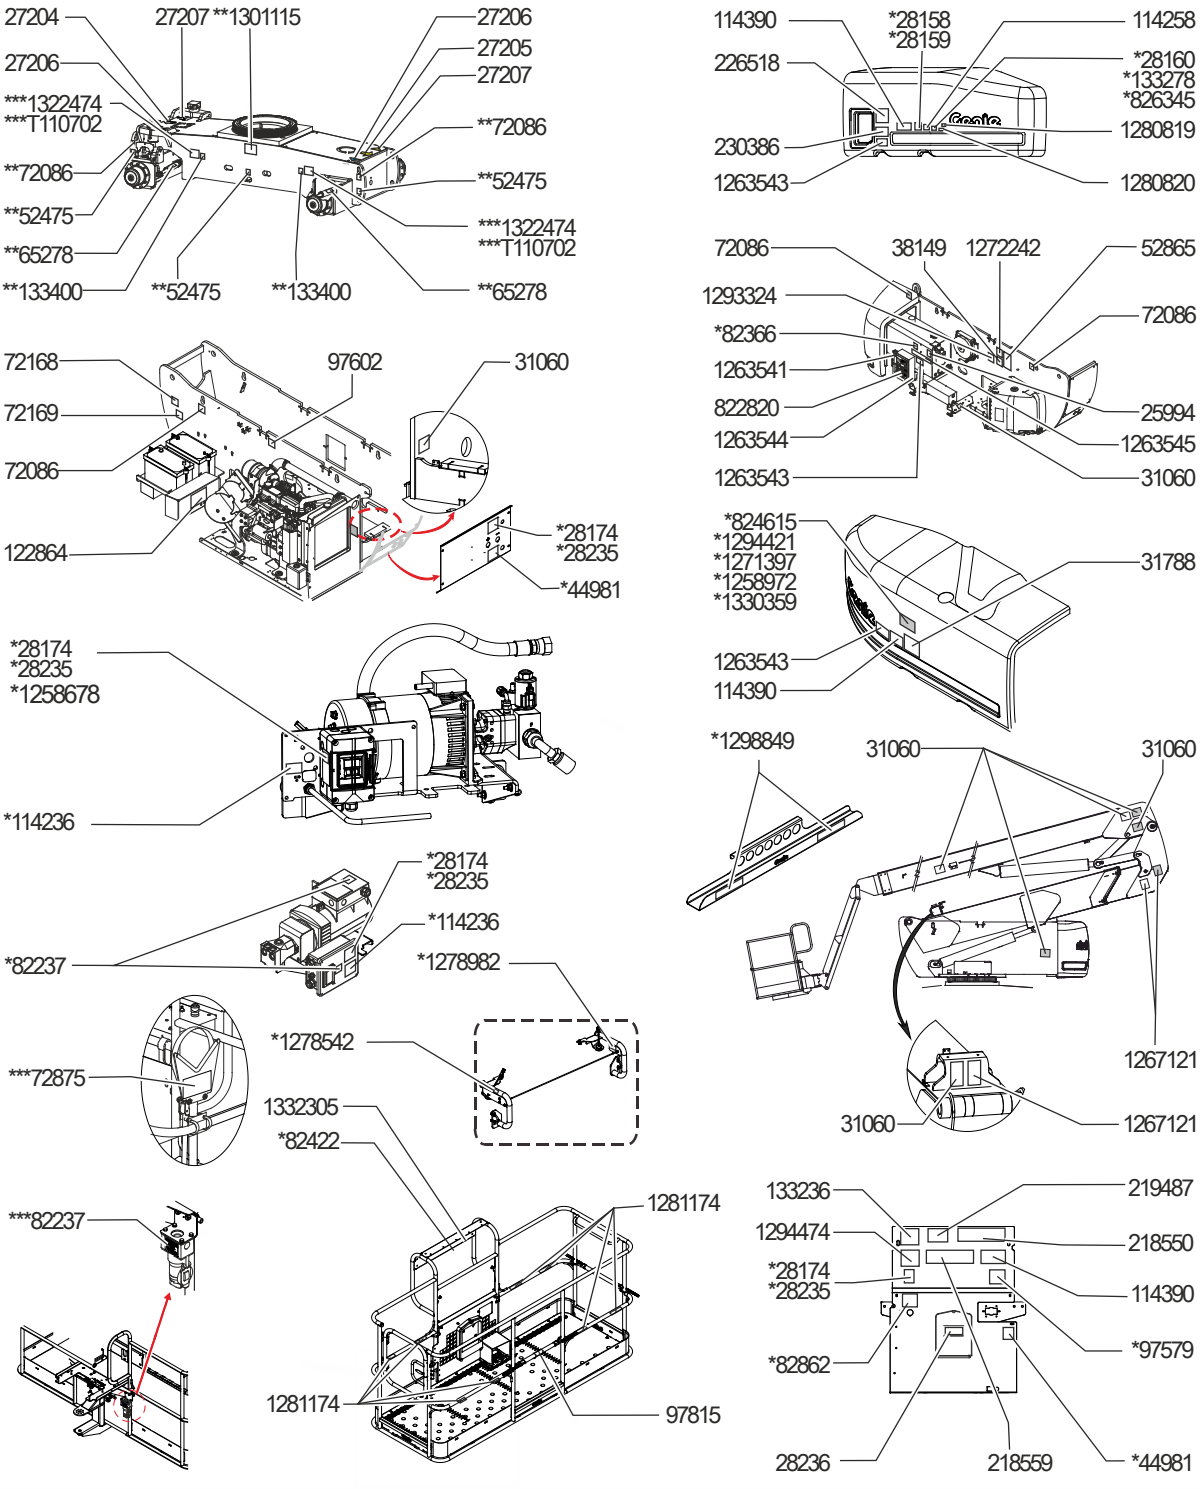

Inspections

Inspection for Decals with Symbols

Use the inspection to verify that all decals are legible and in place.

Below is a numerical list with quantities and descriptions.

Part No.	Decal Description	Qty
27204	Arrow – Blue	1
27205	Arrow – Yellow	1
27206	Triangle – Blue	2
27207	Triangle – Yellow	2
28158	Label – Unleaded*	1
28159	Label – Diesel*	1
28160	Label – Liquid Petroleum Gas*	1
28174	Label – Power to Platform, 230V*	3
28235	Label – Power to Platform, 115V*	3
44981	Label – Air Line to Platform*	2
52475	Label – Transport Tie-down**	6
65278	Caution – No Step**	4
72086	Label – Lifting Point**	7
82422	Label – Lights*	1
82481	Label – Battery/Charger Safety	1
82487	Label – Read the Manual***	4
97815	Label – Lower Mid-rail	1
114236	Label – CB Symbol	1
114248	Label – Tip-over Hazard, Tilt Alarm	1
114249	Label – Tip-over Hazard, Tires**	4
114251	Label – Explosion Hazard	1
114252	Label – Tip-over Hazard, Limit Switches	8
133067	Label – Electrocution Hazard	3
133400	Label – Wheel Load**	4
219954	Label – Tip-over Hazard	1
219956	Label – Platform Overload	1
219958	Label – Tip-over, Crush Hazard	1
230386	Label – Emergency Lowering	1
822820	Ground Control Panel	1
1263540	Label – Tip-over Hazard	1
1263542	Label – Compartment Access	2
1263544	Bypass Key Switch	1
1263545	Instructions – Bypass Key Switch	1
1272242	Label – Machine Registration/Owner Transfer	1
1278542	Instructions – Contact Alarm*	1
1278982	Label – Actuator Switch Socket*	1
1281174	Label – Lanyard Anchorage Point, Fall Arrest/Fall Restrained*	8
1286362	Label – Crush Hazard, Service	3
1294475	Label – Slope Rating, Z-80	1
1298467	Label – Read the Manual*	2
1301115	Label – Transport Diagram**	2
1304217	Label – Explosion Hazard	1
1332305	Platform Control Panel	1


Shading indicates decal is hidden from view, i.e. under covers

* These decals are model, option or configuration specific.

** These decals are installed on both sides of chassis.

*** These decals are installed on both sides of chassis and are model, option, or configuration specific.

Inspections

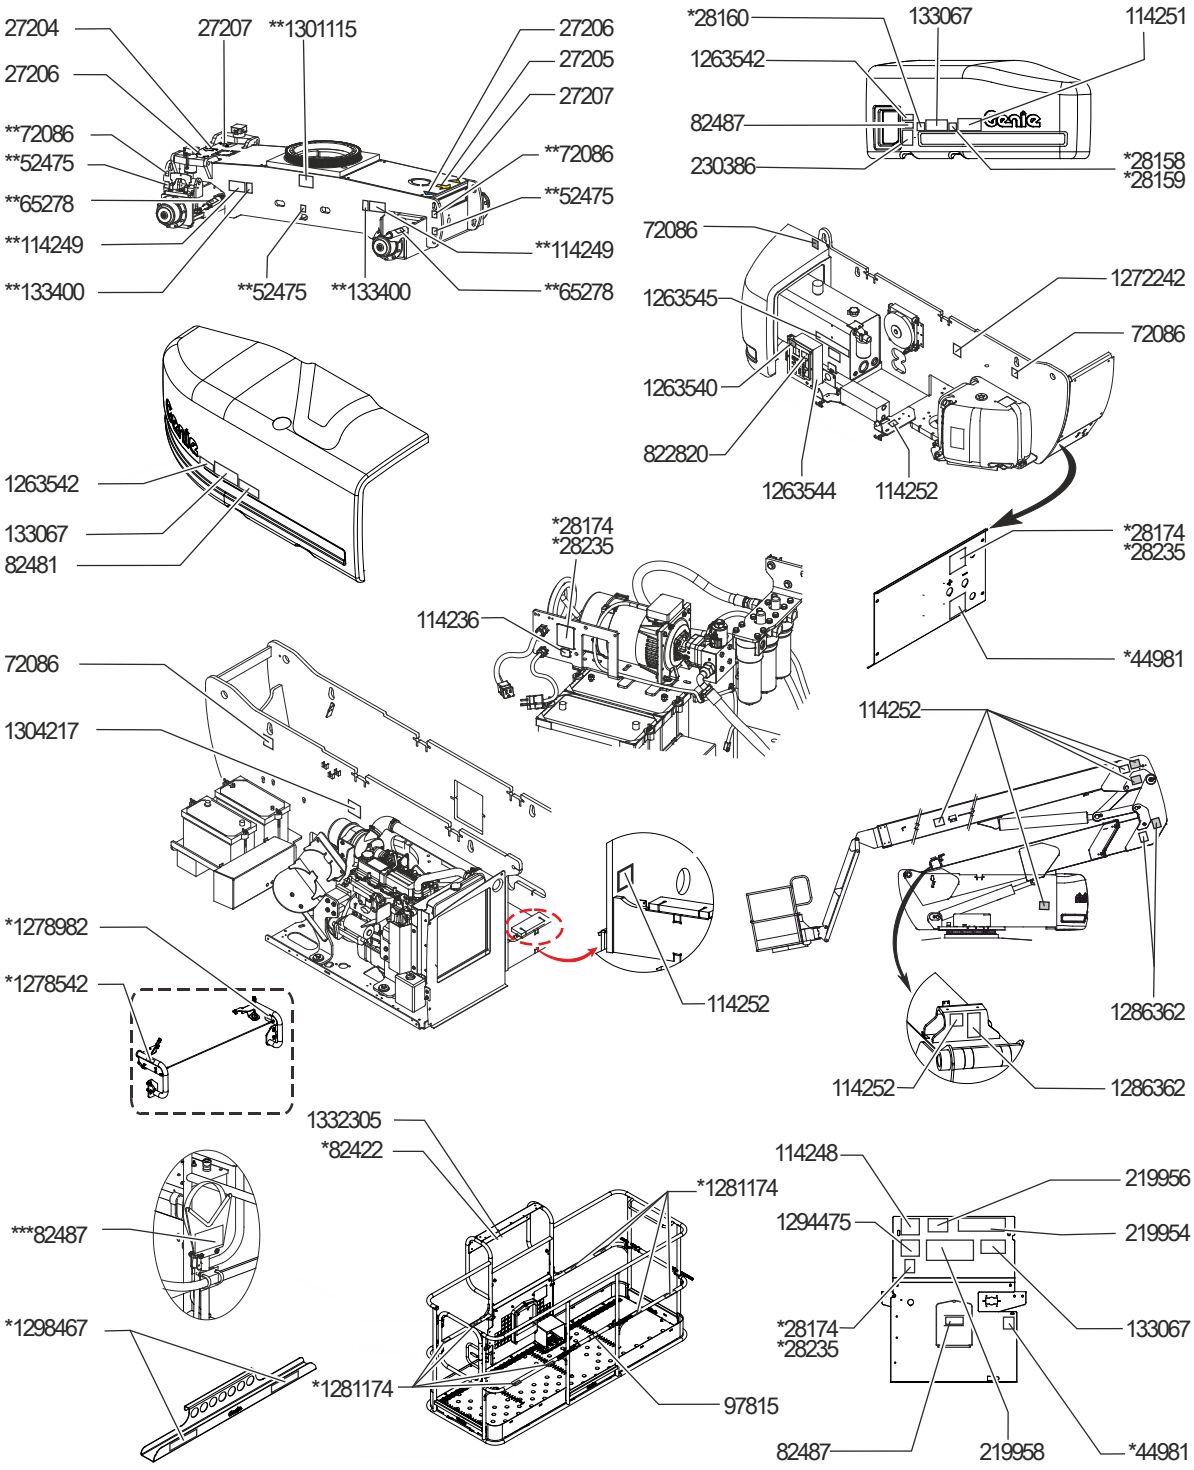

Operating Instructions



Do Not Operate Unless:

☑ You learn and practice the principles of safe machine operation contained in this operator's manual.

1 Avoid hazardous situations.

2 Always perform a pre-operation inspection.

3 Always perform function tests prior to use.

4 Inspect the workplace.

5 Only use the machine as it was intended.

Fundamentals

The Operating Instructions section provides instructions for each aspect of machine operation. It is the operator's responsibility to follow all the safety rules and instructions in the operator's, safety, and responsibilities manuals.

Using the machine for anything other than lifting personnel, along with their tools and materials, to an aerial work site is unsafe and dangerous.

Only trained and authorized personnel should be permitted to operate a machine. If more than one operator is expected to use a machine at different times in the same work shift, they must all be qualified operators and are all expected to follow all safety rules and instructions in the operator's, safety, and responsibilities manuals. That means every new operator should perform a pre-operation inspection, function tests, and a workplace inspection before using the machine.

Operating Instructions

Starting the Engine

1 At the ground controls, turn the key switch to the desired position.

2 Be sure both ground and platform control red Emergency Stop buttons are pulled out to the on position.

Gasoline/LPG models

1 Choose fuel by moving the fuel select switch to the desired position.

2 Move the engine start toggle switch to either side. If the engine fails to start or dies, the restart delay will disable the start switch for 3 seconds.



Diesel models

1 Diesel models with glow plug control: Activate the glow plugs. Push the button or move the switch.

Diesel models with automatic glow plugs: Amber light will be on when glow plugs are on.

2 Start the engine. Push the button or move the switch. If the engine fails to start or dies, the restart delay with disable the start switch for 3 seconds.

All models

If the engine fails to start after 15 seconds of cranking, determine the cause and repair any malfunction. Wait 60 seconds before trying to start again.

In cold conditions, 20°F/-6°C and below, warm the engine for 5 minutes before operating to prevent hydraulic system damage.

In extreme cold conditions, 0°F/-18°C and below, machines should be equipped with optional cold start kits. Attempting to start the engine when temperatures are below 0°F/-18°C may require the use of a booster battery.

Gasoline/LPG models: In cold conditions, 20°F/-6°C and below, the machine should be started on gasoline and warmed for 2 minutes, then switched to LPG. Warm engines can be started on LPG.

Operating Instructions

Emergency Stop

Push in the red Emergency Stop button to the off position at the ground controls or the platform controls to stop all machine functions and turn the engine off.

Repair any function that operates when either red Emergency Stop button is pushed in.

Selecting and operating the ground controls will override the platform red Emergency Stop button.

Auxiliary Controls


Use auxiliary power if the primary power source fails.

1 Turn the key switch to ground or platform control.

2 Pull out the red Emergency Stop button to the on position.

3 Press down the foot switch when using the controls from the platform.

4 Activate the auxiliary controls. Move and hold the switch or push and hold the button. Activate each function control handle, switch or button.



The drive function will not operate with auxiliary power.

Operation from Ground

1 Turn the key switch to ground control.

2 Pull out the red Emergency Stop button to the on position.

3 Gasoline/LPG models: Choose fuel source.

4 Start the engine.

To Position Platform

1 Push and hold the function enable button.



Note: If the function enable control (i.e., button or foot switch) is activated and a function control is not activated after a pre-determined duration, the function enable controls will deactivate. The operator should then release the function enable control and try again.

2 Push the appropriate function button according to the markings on the control panel.

Drive and steer functions are not available from the ground controls.

Platform Overload Indicator Light

Light flashing indicates the platform is overloaded. The engine will stop and no functions will operate.

Remove weight from the platform until the light goes off and then restart the engine.

Note: An alarm will sound at the platform when an overload condition occurs and will stop sounding when weight is removed from the platform.

Operating Instructions

Operation from Platform

1 Turn the key switch to platform control.

2 Pull out both ground and platform red Emergency Stop buttons to the on position.

3 Gasoline/LPG models: Choose fuel source.

4 Start the engine. Do not press down the foot switch when starting the engine.

To Position Platform

1 Press down the foot switch.

Note: If the function enable control (i.e., button or foot switch) is activated and a function control is not activated after a pre-determined duration, the function enable controls will deactivate. The operator should then release the function enable control and try again.

2 Slowly move the appropriate function control handle or toggle switch or press the appropriate button according to the markings on the control panel.

To Steer

1 Press down the foot switch.

Models with 4 wheel steer:

2 Select steer mode. Press the button or move the switch. The indicator light next to the current steer mode will be on.



All models:

3 Slowly move the drive control handle in the direction indicated by blue or yellow triangles OR press the thumb rocker switch located on top of the drive control handle.



Use the color-coded direction arrows on the platform controls and the drive chassis to identify the direction the wheels will turn.

To Drive

1 Press down the foot switch.

2 Increase speed: Slowly move the drive/steer control handle in the direction indicated by the blue or yellow arrows.



Decrease speed: Slowly move the drive/steer control handle toward center.

Stop: Return the drive/steer control handle to center or release the foot switch.

Use the color-coded direction arrows on the platform controls and the drive chassis to identify the direction the machine will travel.

Machine travel speed is restricted when the platform is raised or extended.

Operating Instructions

Platform Overload Indicator Light

Light flashing indicates the platform is overloaded. The engine will stop and no functions will operate.

Remove weight from the platform until the light goes off and then restart the engine.

Note: An alarm will sound at the platform when an overload condition occurs and will stop sounding when weight is removed from the platform.

⚠ Driving on a slope

Determine the uphill, downhill and side slope ratings for the machine and determine the slope grade.



Maximum slope rating, platform downhill (gradeability):
2WD: 30% (17°)
4WD: 45% (24°)



Maximum slope rating, platform uphill:
2WD: 15% (9°)
4WD: 35% (19°)



Maximum side slope rating:
25% (14°)

Note: Slope rating is subject to ground conditions with one person in the platform and adequate traction. Additional platform weight may reduce slope rating. The term gradeability applies to the counterweight uphill configuration only.

Be sure the boom is below horizontal and the platform is between the circle-end (yellow arrow) wheels.

Select machine on incline drive setting. Move the switch or push the button until the light next to the machine on incline symbol is on.

To determine the slope grade:

Measure the slope with a digital inclinometer OR use the following procedure.

You will need:

- carpenter’s level
- straight piece of wood, at least 3 feet/1 m long
- tape measure


Lay the piece of wood on the slope.

At the downhill end, lay the level on the top edge of the piece of wood and lift the end until the piece of wood is level.

While holding the piece of wood level, measure the vertical distance from the bottom of the piece of wood to the ground.

Divide the tape measure distance (rise) by the length of the piece of wood (run) and multiply by 100.

Example:

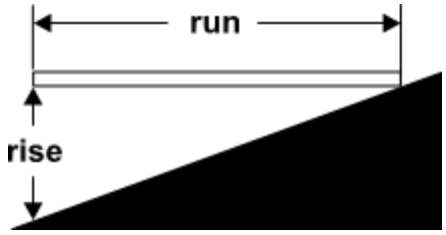

Piece of wood = 144 inches (3.6 m)

Run = 144 inches (3.6 m)

Rise = 12 inches (0.3 m)

12 in ÷ 144 in = 0.083 x 100 = 8.3% grade
0.3 m ÷ 3.6 m = 0.083 x 100 = 8.3% grade

If the slope exceeds the maximum slope or side slope rating, then the machine must be winched or transported up or down the slope. See Transport and Lifting section.

Operating Instructions

Drive Enable



Light on indicates that the boom has moved just past either circle-end wheel and the drive function is turned off.

To drive, push the drive enable button or move the drive enable switch to either side and slowly move the drive/steer control handle off center.

If the drive/steer control handle is not moved within two seconds of activating the drive enable. the drive function will not operate. Release and active the drive enable again.

Be aware that the machine may move in the opposite direction that the drive and steer controls are moved.

Always use the color-coded direction arrows on the platform controls and the drive chassis to identify the direction the machine will travel.

Generator (if equipped)

To operate the generator, press the generator button or move the switch. The indicator light will come on the engine will continue to run.

Plug a power tool into the power to platform GFCI outlet.

To turn off the generator, press the generator button or move the switch. The indicator light will turn off.

Engine Idle Select (rpm)

Select engine idle (rpm). Push the button or move the switch. The indicator light next to the current setting will be on.



- Rabbit and foot switch symbol: foot switch activated high idle
- Turtle symbol: low idle
- Rabbit symbol: high idle

Check Engine Light



Light on and engine stopped: Tag the machine and remove from service.

Light on and engine still running: Contact service personnel within 24 hours.

Operating Instructions

Operating Envelope Indicator Lights

The operating envelope indicator lights will come on to notify the operator that a function has been interrupted and/or an action is required by the operator.

Lower Primary Boom indicator light flashing: Lower the primary boom until the indicator light is off.



Machine Not Level indicator light flashing: The tilt alarm will be sounding when this light is flashing. Move the machine to a firm, level surface.



Platform Not Level indicator light flashing: The tilt alarm will be sounding when this light is flashing. The Platform Level toggle switch will only work in the direction that will level the platform. Level the platform until the indicator light is off.



Platform Level Recovery

1 Press down the foot switch.

2 Push and hold the platform level recovery switch up.

3 Move the platform level switch in the desired direction.

Note: The platform level switch will only work in the direction that will return the platform to a level position.

Note: From +/-10 degrees of platform level up to +/-14.9 degrees the platform can still be recovered from the ground controls or by using the platform level recovery toggle switch in the procedure above. Once the platform level reaches +/-15 degrees the only way to recover is to use the Service/Recovery key switch on the side of the ground controls to activate Recovery Mode.

Operating Instructions

Platform Out of Level (P22 code)


Bypass key position to be used to level the platform if ground control display shows platform out of level (P22) and platform level controls do not work.

To operate:

1 Turn the engine off.

2 Turn the main key switch to ground control. Remove the key from the main key switch and insert the key into the bypass/recovery key switch.

3 Turn the bypass/recovery key switch to the bypass position.



4 Using auxiliary power, operate the platform level button to level the platform.

5 Turn the bypass/recovery key switch to the run position.

6 Remove the key from the bypass/recovery key switch and insert the key into the main key switch.

7 Push in and then pull out the red Emergency Stop button.

8 If the P22 code is still visible, tag and remove the machine from service until the fault has been corrected by a qualified service technician.

Tilt Sensor Activation Settings

Model	Chassis Angle (side to side)	Chassis Angle (front to back)
Z-80	5°	5°

When the Machine On Incline indicator light is on and the tilt alarm sounds, the following functions are affected; drive functions are disabled.



To restore drive functions, follow the boom lowering process, explained in the previous procedure.

When the machine is stowed, on a slope, and the tilt alarm sounds, the following functions are affected; lift functions are disabled.



Return the machine to level ground to restore lift functions.

Operating Instructions

Platform Out of Level (Platform Level > 15 Degrees Fault)

If ground control display shows PLATFORM LEVEL > 15 DEGREES FAULT and the platform level controls do not work, the machine will need to be recovered by trained and authorized personnel or a qualified service technician.

Generator (if equipped)

To operate the generator, press the generator button or move the switch. The indicator light will come on and the engine rpm will automatically be in turtle symbol mode.

The engine will continue to run the drive functions and the platform functions will operate.

If the rabbit symbol or the rabbit and foot switch symbol are selected, the generator will shut off and the indicator light will go off.

Plug a power tool into the power to platform GFCI outlet.

To turn off the generator, press the generator button or move the switch. The indicator light will turn off.

Drive Speed Select




- Machine on incline symbol: Low range operation for inclines
- Machine on level surface symbol: High range operation for maximum drive speed.

Machine Not Level Indicator Light



If the tilt alarm sounds when the platform is raised, the Machine Not Level indicator light will come on and the drive function in one or both directions will not operate. Identify the condition of the boom on the slope as shown below. Follow the steps to lower the boom before moving to a firm, level surface. Do not rotate the boom while lowering.

If the tilt alarm sounds with the platform uphill:




1 Lower the primary boom.

2 Lower the secondary boom.

3 Retract the primary boom.

If the tilt alarm sounds with the platform downhill:



1 Retract the primary boom.

2 Lower the secondary boom.

3 Lower the primary boom.

Operating Instructions

Machine Malfunction Indicator Light



Light on indicates all functions have stopped.

1 Push in and then pull out the red Emergency Stop button.

2 Lower and retract the boom.

3 Tag the machine and remove from service. Functions will not operate.

Platform Overload Indicator Light



Light flashing indicates the platform is overloaded. The engine will stop and no functions will operate.

Remove weight from the platform until the light goes off and then restart the engine.

Engine Shut-down indicator light (if equipped)



Light on: Tag and remove the machine from service.

Out of Operational Envelope Recovery

If all functions stop operating, you may have exceeded the operational envelope. A trained operator on the ground will need to lower the platform from the ground controls. Please see the Service Bypass / Recovery Key Switch section in the service manual.

LCD Screen (if equipped)

The LCD screen displays hour meter, voltage, oil pressure and coolant temperature. The screen also displays fault codes and other service information.

Perkins Engine


Machines equipped with Perkins 404TF-22 Diesel engines have a regeneration mode that should run automatically when needed.

LCD will display REGEN FORCED and WARNING HIGH EXHAUST SYSTEM TEMP when the regeneration mode is running. No service required.

Stopping the Engine

Push in the red Emergency Stop button and turn the key switch to the off position.

Aircraft Protection Package (if equipped)



If the platform bumper comes into contact with an object, the machine will shut down and no functions will operate.

1 Start the engine.

2 Press down the foot switch.

3 Move and hold the aircraft protection override switch.

4 Move the appropriate function control handle or toggle switch to move the machine away from aircraft components.

Operating Instructions


Contact Alarm (if equipped)

The contact alarm is designed to alert ground personnel when an operator makes contact with the platform control panel, interrupting boom movement, sounding an alarm and flashing warning lights.

When the contact alarm cable is tripped, the lift and drive functions are disabled at the platform. The audio and visual warnings will activate alerting others that assistance may be needed. These notifications will continue until the system is reset.

1 The contact alarm cable is tripped, releasing the actuator from the switch socket.


2 Insert the actuator into the switch socket to turn off flashing lights and audio alarm.

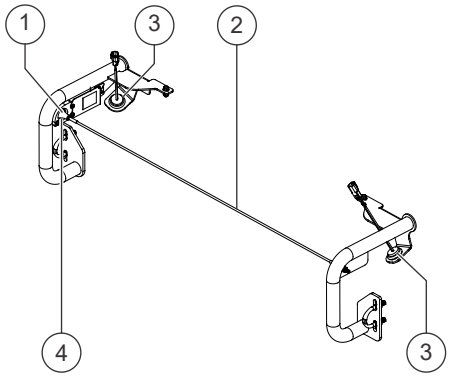

1 actuator
2 contact alarm cable
3 flashing alarm
4 switch socket

Pipe Cradle Instructions

The pipe cradle assembly consists of 2 pipe cradles positioned at either side of the platform and mounted to the guardrails with U-bolts.

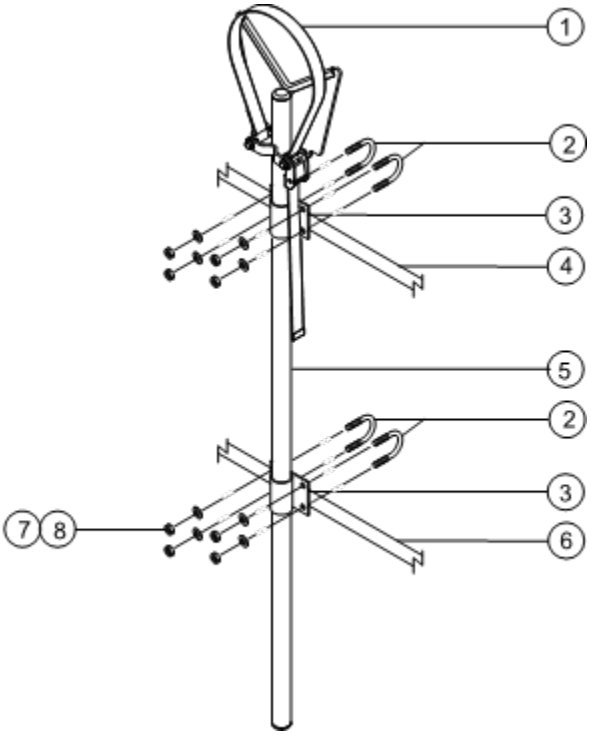

1 strap
2 U-bolts
3 pipe cradle mount
4 upper platform railing
5 pipe cradle weldment
6 middle platform railing
7 flat washers
8 nylock nuts


Operating Instructions

Observe and Obey:

- ☑ Pipe cradles must be installed on the inside of the platform.
- ☑ Pipe cradles must not obstruct the platform controls or the platform entrance.
- ☑ The bottom of the pipe cradle tube must rest on the platform floor.
- ☑ Be sure the platform is level before installing a pipe cradle.

Pipe Cradle Instructions

The pipe cradle assembly consists of 2 pipe cradles positioned at either side of the platform and mounted to the guardrails with U-bolts.

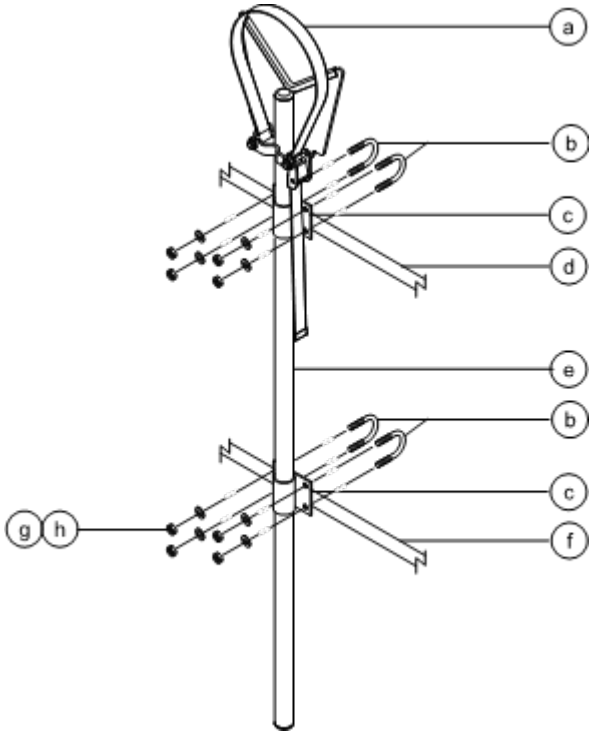

a strap
b U-bolts
c pipe cradle mount
d upper platform railing
e pipe cradle weldment
f middle platform railing
g flat washers
h nylock nuts

Operating Instructions

Observe and Obey:

☑ Pipe cradles must be installed on the inside of the platform.

☑ Pipe cradles must not obstruct the platform controls or the platform entrance.

☑ The bottom of the pipe cradle tube must rest on the platform floor.

☑ Be sure the platform is level before installing a pipe cradle.

Pipe Cradle Installation

1 Install a pipe cradle on each side of the platform. Refer to the illustration on the left. Make sure the bottom of the pipe cradle tube rests on the platform floor.

2 Install two U-bolts from the outside of the platform rails through each pipe cradle mount.

3 Secure each U-bolt with 2 washers and 2 nuts.

Pipe Cradle Operation

1 Be sure the pipe cradle assembly and installation instructions have been followed properly and that the pipe cradles are secured to the platform railings.

2 Place the load so that it rests in both pipe cradles. The length of the load should be parallel with the length of the platform.

3 Center the load in the pipe cradles.

4 Secure the load to each pipe cradle. Pass the nylon strap over the load. Depress the buckle and slide the strap through. Tighten the strap.

5 Gently push and pull on the load to make sure the pipe cradles and load are secure.

6 Keep the load secured when the machine is moving.

⚠ Tip-over hazard. The weight of the pipe cradle assembly and the load in the pipe cradles will reduce the rated platform capacity of the machine and must be factored into the total platform load.

⚠ Tip-over hazard. The weight of the pipe cradle assembly and the load in the pipe cradles may limit the maximum number of occupants in the platform.

Maximum Pipe Cradle Capacity	
All models	200 lbs 90.7 kg
Pipe Cradle Assembly Weight	21 lbs 9.5 kg

Operating Instructions

Panel Cradle

Panel Cradle Assembly - Weld-In

1 Weld-in Panel Cradle comes pre-assembled.


Panel Cradle Installation - Weld-In

Note: Perform this procedure on a firm, level surface with the boom in the stowed position.

Note: Kit decals should already be installed onto the tray.

1 Adjust the platform so that the toe board at the front of the platform is at a comfortable working height.

2 Place the Panel Cradle Tray over the toe board and push it down until the tray is flush across the top of the toe board with the slots on the back of the tray aligned with corresponding slots in the toe board.

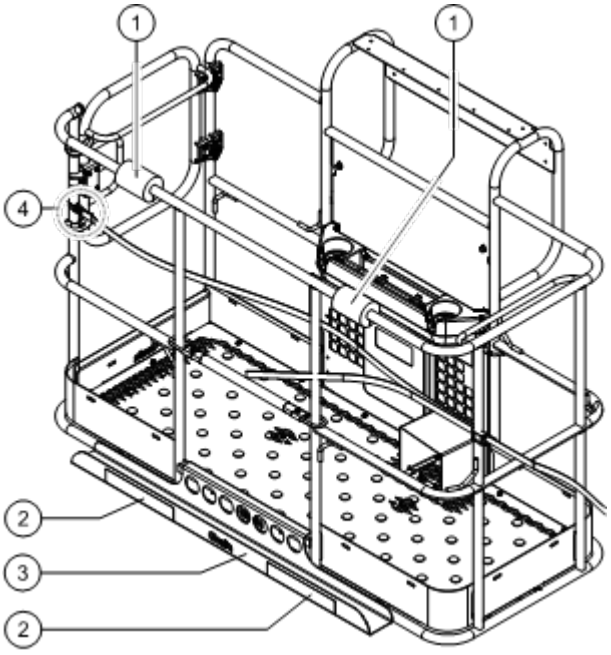

1 foam pad x 2
2 decal x 2
3 panel cradle tray
4 clamp

3 Use the provided fasteners to secure the tray to the platform. Tighten the fasteners.

Installation of Padding

Install the 2 pieces of padding on the platform rails. Position the padding to protect the panels from contact with the platform rails.

Installation of Strap

1 Open the clamp and install it around a vertical platform rail tube.

2 Insert a bolt with a washer through one side of the clamp.

3 Install the strap assembly end plate onto the bolt.

4 Insert the bolt through the other side of the clamp.

Secure with a washer and a nut. Do not over-tighten.

Note: The strap assembly must be secured between the clamp.

Note: The strap assembly should be able to slide freely up and down the platform rail.

Panel Cradle Operation

Note: The bolt-in style has 2 cradles and the Weld-in has 1.

Operating Instructions:

1 Secure the panel cradle and strap assembly to the platform.

2 Center the load on the platform.

3 Secure the load to the platform using the strap.

4 Tighten the strap.

Operating Instructions

After Each Use

1 Select a safe parking location—firm level surface, clear of obstruction and traffic.

2 Retract and lower the boom to the stowed position.

3 Rotate the turntable so that the boom is between the non-steer wheels.

4 Turn the key switch to the off position and remove the key to secure from unauthorized use.

Machine Storage

Properly preparing and stowing the machine for extended storage will make it easier to put the machine back into service.

1 See After Each Use section for basic machine stowing instructions.

2 Store the machine in a dry and well-ventilated location. Be sure machine is clean and dry.

3 Perform a complete Pre-Operation Inspection.

Models with Engines: fill the fuel tank.

4 Refer to the Scheduled Maintenance section in the appropriate Service Manual, and complete each lubrication procedure.

5 Remove and store the battery.

6 Models with Engines: Refer to the OEM engine manual for additional extended storage procedures. As needed, start and run the engine for 10 minutes.

Transport and Lifting Instructions


Observe and Obey:

- ☑ Genie provides this securement information as a recommendation. Drivers are solely responsible for making sure machines are properly secured and the correct trailer is selected pursuant to US Department of Transportation regulations, other localized regulations, and their company policy.
- ☑ Genie customers needing to containerize any lift or Genie product should source a qualified freight forwarder with expertise in preparing, loading and securing construction and lifting equipment for international shipment.
- ☑ Only qualified mobile elevating work platform operators should move the machine on or off the truck.
- ☑ The transport vehicle must be parked on a level surface.
- ☑ The transport vehicle must be secured to prevent rolling while the machine is being loaded.
- ☑ Be sure the vehicle capacity, loading surfaces and chains or straps are sufficient to withstand the machine weight. Genie lifts are very heavy relative to their size. See the serial label for the machine weight.
- ☑ Be sure the turntable is secured with the turntable rotation lock before transporting. Be sure to unlock the turntable for operation.
- ☑ Do not drive the machine on a slope that exceeds the uphill, downhill or side slope rating. See Driving on a Slope in the Operating Instructions section.
- ☑ If the slope of the transport vehicle bed exceeds the maximum slope rating, the machine must be loaded and unloaded using a winch as described in the brake release operation.

Free-wheel Configuration for Winching

Chock the wheels to prevent the machine from rolling.

Release the circle end wheel brakes by turning over the drive hub disconnect caps.



Be sure the winch line is properly secured to the drive chassis tie points and the path is clear of all obstructions.


Reverse the procedures described to re-engage the brakes.

Towing the Genie Z-80/60 is not recommended. If the machine must be towed, do not exceed 2 mph / 3.2 km/h.

Transport and Lifting Instructions

Securing to Truck or Trailer for Transit

Always use the turntable rotation lock pin each time the machine is transported.

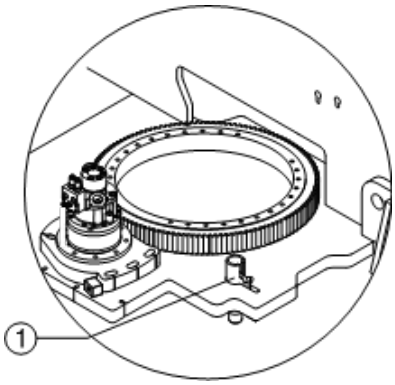

1 Turntable rotation lock pin

Turn the key switch to the off position and remove the key before transporting.


Inspect the entire machine for loose or unsecured items.

Securing the Chassis

Use chains of ample load capacity.

Use a minimum of 5 chains.

Adjust the rigging to prevent damage to the chains.

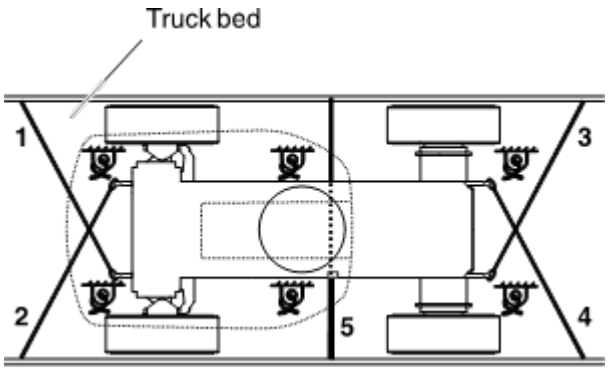


Securing the Platform

Make sure the jib and platform are in the stowed position.

Place a block under the platform rotator. Do not allow the block to contact the platform cylinder.

Secure the platform with a nylon strap placed through the lower platform support. Do not use excessive downward force when securing the boom section.

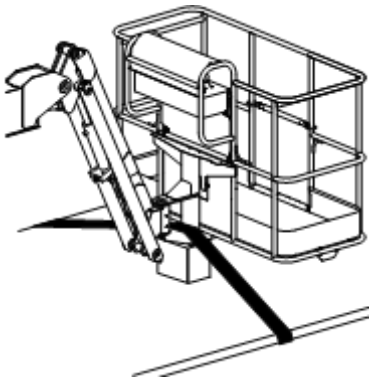

Transport and Lifting Instructions

Observe and Obey:

- ☑ Only qualified riggers should rig the machine.
- ☑ Only certified crane operators should lift the machine and only in accordance with the applicable crane regulations.
- ☑ Be sure the crane capacity, loading surfaces and straps or lines are sufficient to withstand the machine weight. See the serial label for the machine weight.

Lifting Instructions


Fully lower and retract the boom. Fully lower the jib. (if equipped)

Determine the center of gravity of your machine using the table and the picture on this page.

Attach the rigging only to the designated lifting points on the machine. All four of the lifting points are on the turntable.

Adjust the rigging to prevent damage to the machine and to keep the machine level.

Center of gravity	X Axis	Z Axis	Y Axis
Z-80/60	86.8 cm	1.42 m	1.00 m

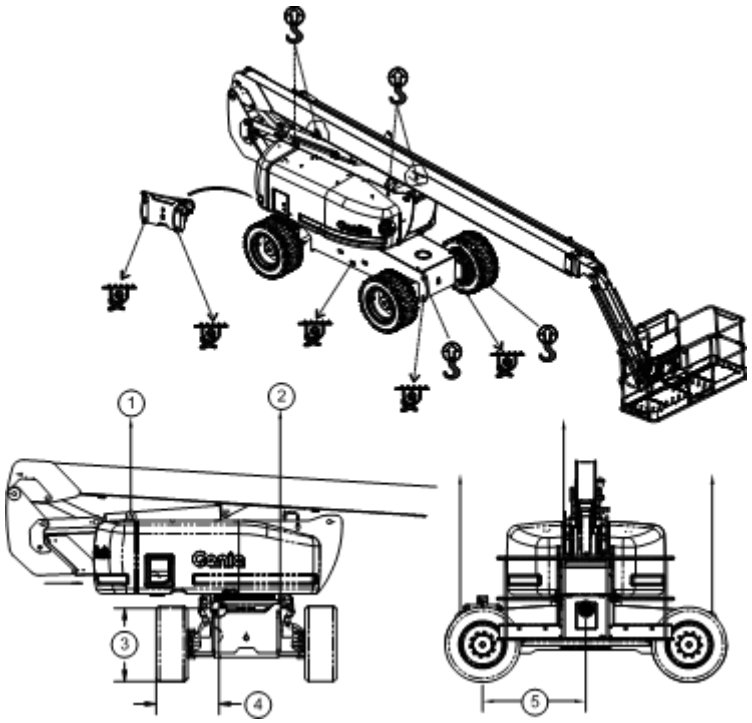

1 Turntable Lifting Point

2 Chassis lifting Points (2)

3 Center of Gravity Y Axis

4 Center of Gravity X Axis

5 Center of Gravity Z Axis

Maintenance

Observe and Obey:

- ☑ Only routine maintenance items specified in this manual shall be performed by the operator.
- ☑ Scheduled maintenance inspections shall be completed by qualified service technicians, according to the manufacturer's specifications and the requirements specified in the responsibilities manual.
- ☑ Use only Genie approved replacement parts.

Maintenance Symbols Legend

The following symbols have been used in this manual to help communicate the intent of the instructions. When one or more of the symbols appear at the beginning of a maintenance procedure, it conveys the meaning below.



Indicates that tools will be required to perform this procedure.



Indicates that new parts will be required to perform this procedure.



Indicates that a cold engine is required before performing this procedure.

Check the Engine Oil Level



Maintaining the proper engine oil level is essential to good engine performance and service life. Operating the machine with an improper oil level can damage engine components.

Note: Check the oil level with the engine off.

1 Check the oil level dipstick. Add oil as needed.

Perkins 404D-22 Engine	
Oil type	15W-40
Oil type - cold conditions	5W-40
Perkins 404F-22T Engine	
Oil type	15W-40
Oil type - cold conditions	5W-40
Deutz D2.9 L4 Engine	
Oil type	15W-40
Oil type - cold conditions	5W-40
Deutz TCD 2.2L Stage V Engine	
Oil type	15W-40
Oil type - cold conditions	5W-40
Deutz F3L 2011F Engine	
Oil type	15W-40
Oil type - cold conditions	5W-40
GM 3.0L I4 Engine	
Oil type	5W-30
Oil type - cold conditions	5W-30
Deutz BF4L2011 Engine	
Oil type	15W-40
Oil type - cold conditions	5W-30

Check the Hydraulic Oil Level



Maintaining the hydraulic oil at the proper level is essential to machine operation. Improper hydraulic oil levels can damage hydraulic components. Daily checks allow the inspector to identify changes in oil level that might indicate the presence of hydraulic system problems.

1 Be sure that the boom is in the stowed position.

2 Visually inspect the sight gauge located on the side of the hydraulic oil tank.

⊙ Result: The hydraulic oil level should be within the top 2 inches / 5 cm of the sight gauge.

3 Add oil as needed. Do not overfill.

Hydraulic oil specifications	
Hydraulic oil type	Chevron Rando HD equivalent

Check the Engine Coolant Level – Liquid Cooled Models




Maintaining the engine coolant at the proper level is essential to engine service life. Improper coolant level will affect the engine's cooling capability and damage engine components. Daily checks will allow the inspector to identify changes in coolant level that might indicate cooling system problems.

⚠ Burn hazard. Beware of hot engine parts and coolant. Contact with hot engine parts and/or coolant may cause severe burns.

⚠ Burn hazard. Do not remove the radiator cap if the engine has been running. Contact with pressurized coolant may cause severe burns. Allow engine to cool before removing the radiator cap.

1 Check the fluid level in the coolant recovery tank. Add fluid as needed.

⊙ Result: The fluid level should be at the FULL mark on the tank or visible in the sight gauge.

Maintenance

Check the Batteries

Proper battery condition is essential to good machine performance and operational safety. Improper fluid levels or damaged cables and connections can result in component damage and hazardous conditions.

⚠ Electrocution hazard. Contact with hot or live circuits may result in death or serious injury. Remove all rings, watches and other jewelry.

⚠ Bodily injury hazard. Batteries contain acid. Avoid spilling or contacting battery acid. Neutralize battery acid spills with baking soda and water.

1 Put on protective clothing and eye wear.

2 Be sure that the battery cable connections are tight and free of corrosion.

3 Be sure that the battery hold-down brackets are in place and secure.

Note: Adding terminal protectors and a corrosion preventative sealant will help eliminate the corrosion on the battery terminals and cables.

Diesel Fuel Requirements

Satisfactory engine performance is dependent on the use of a good quality fuel. The use of a good quality fuel will give the following result: long engine life and acceptable exhaust emissions levels.

Minimum diesel fuel requirements for each engine are listed below.

Perkins 404D-22 Engine	
Fuel Type	Low Sulfur Diesel (LSD)
Perkins 404F-22T Engine	
Fuel Type	Ultra Low Sulfur Diesel (ULSD)
Deutz D2011 L03i Engine	
Fuel Type	Low Sulfur Diesel (LSD)
Deutz D2.9 L4 Engine	
Fuel Type	Ultra Low Sulfur Diesel (ULSD)
Deutz TCD 2.2L Stage V Engine	
Fuel Type	Ultra Low Sulfur Diesel (ULSD)
Deutz BF4L2011 Engine	
Fuel Type	Low Sulfur Diesel (LSD)

Maintenance

Scheduled Maintenance

Maintenance performed commissioning, quarterly, annually and every two years must be completed by a person trained and qualified to perform maintenance on this machine according to the procedures found in the service and maintenance manuals for this machine.

Machines that have been out of service for more than three months must receive the quarterly inspection before they are put back into service.

Obey all local and governmental regulations regarding the disposal and decommissioning of the machine at the end of its lifetime. Refer to the appropriate Genie service manual for additional information.

Specifications

Model		Z®-80/60
Height, working maximum	84 ft	25.6 m
Height, platform maximum	78 ft	23.8 m
Height, stowed maximum	9 ft 10 in	3 m
Horizontal reach, maximum	60 ft	18.3 m
Width	8 ft 2 in	2.5 m
Length, stowed	37 ft	11.3 m
Length, stowed for transport	30 ft	9.1 m
Maximum load capacity	500 lbs	227 kg
Maximum wind speed	28 mph	12.5 m/s
Wheelbase	9 ft 4 in	2.84 m
Ground clearance	12 in	30 cm
Turning radius (outside) 2 wheel steer 4 wheel steer	 24 ft 6 in 15 ft	 7.5 m 4.5 m
Turning radius (inside) 2 wheel steer 4 wheel steer	 14 ft 6 in 7 ft	 4.4 m 2.1 m
Turntable rotation (degrees)		continuous
Turntable tailswing, secondary boom lowered	7 ft 4 in	2.24 m
Turntable tailswing, secondary boom raised	3 ft 10 in	1.17 m
Ambient operating temperature		-20° F to 120° F -29° C to 49° C
Controls		12V DC proportional
Platform dimensions, 6 foot (length x width)	72 x 30 in	182 x 76 cm
Platform dimensions, 8 foot (length x width)	96 x 36 in	244 x 91 cm
Platform leveling		self-leveling
Platform rotation		160°
AC outlet in platform		Standard
Hydraulic pressure, maximum (boom functions)	3200 psi	220 bar
System voltage		12V
Tire size		18-625, 16 ply FF
Weight	38,000 lbs	17.237 kg
(Machine weights vary with option configurations. See serial label for specific machine weight.)		
Fuel tank capacity, diesel	35 gallons	132 liters
Fuel tank capacity, gasoline	30 gallons	114 liters

Maximum slope rating, stowed position, 2WD		
Counterweight uphill	30%	17°
Counterweight downhill	15%	9°
Side slope	25%	14°
Maximum slope rating, stowed position, 4WD		
Counterweight uphill	45%	24°
Counterweight downhill	35%	19°
Side slope	25%	14°

Note: Slope rating is subject to ground conditions with one person in the platform and adequate traction. Additional platform weight may reduce slope rating.

Maximum allowable chassis inclination	Refer to "Tilt Sensor Activation Settings" section

Drive speeds (foam-filled tires)		
Drive speed, stowed	3 mph 40 ft/9.1 sec	4.8 km/h 12.2 m/9.1 sec
Drive speed, raised or extended – all models	0.7 mph 40 ft/40 sec	1.1 km/h 12.2 m/40 sec
Drive speeds (high flotation tires)		
Drive speed, stowed	1.9 mph 40 ft/13.6 sec	3.1 km/h 12.2 m/13.6 sec
Drive speed, raised or extended – all models	0.44 mph 40 ft/62 sec	0.64 km/h 12.2 m/62 sec

Machine Classification	Group B/Type 3 as defined by ISO 16368


Floor loading information		
Tire load maximum	22,500 lbs	10,206 kg
Tire contact pressure	130 psi	9.1 kg / cm^2 896 kPa
Occupied floor pressure	377 psf	1841 kg / m^2 18.5 kPa

Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation.

Specifications

Z-80 Range of motion chart

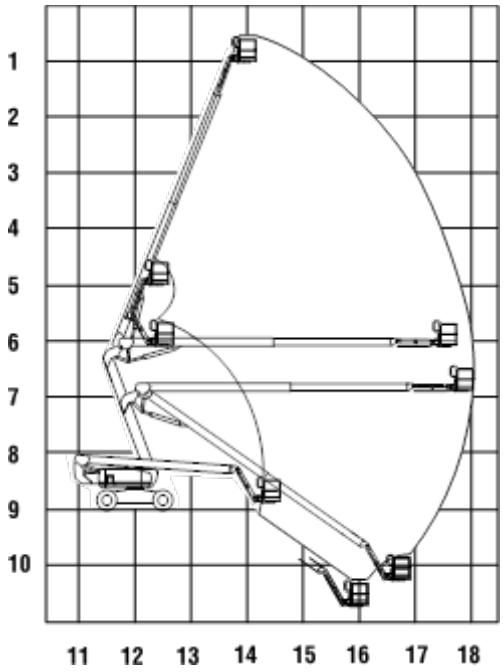

Max Height		
1	80 ft	24.4 m
2	70 ft	21.3 m
3	60 ft	18.3 m
4	50 ft	15.2 m
5	40 ft	12.2 m
6	30 ft	9.1 m
7	20 ft	6.1 m
8	10 ft	3 m
9	0 ft	0 m
10	-10 ft	-3 m

Max Reach		
11	-10 ft	-3 m
12	0 ft	0 m
13	10 ft	3 m
14	20 ft	6.1 m
15	30 ft	9.1 m
16	40 ft	12.2 m
17	50 ft	15.2 m
18	60 ft	18.3 m

California Proposition 65

WARNING

Operating, servicing and maintaining this equipment can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. These chemicals can be emitted from or contained in other various parts and systems, fluids and some component wear by-products. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your equipment and vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your equipment or vehicle and after operation. For more information go to www.P65Warnings.ca.gov/passenger-vehicle.

Breathing diesel engine exhaust exposes you to chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

- Always start and operate the engine in a well-ventilated area.
- If in an enclosed area, vent the exhaust to the outside.
- Do not modify or tamper with the exhaust system.
- Do not idle the engine except as necessary.

For more information go to www.P65warnings.ca.gov/diesel.

Distributed By: